


28 503 832



- 180-210mm projection
- ball-joint pivotable through 30°
- normal flow
- with anti-scale system
- spray head Ø 100mm
- rosette Ø 55 mm
- 1/2" connection
- max. flow 6.8 l/min
- rosette Ø 55 mm
- WRAS

<div> <div></div> Chrome </div>	28 503 832-00
<div> <div></div> Soft Black </div>	28 503 832-69

Flow rate chart

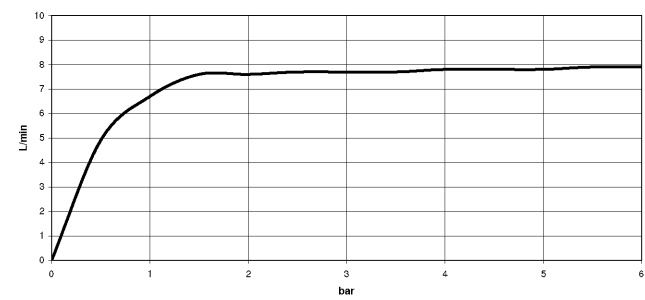

Codes & Standards

DIN 4109

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

Ü-Zeichen



DORNBACHT YARRE Shower head - Chrome

DORNBACHT  
YARRE

28 503 832

Certificates and sustainability

LGA\_28

WRAS\_240202