

Shower thermostat for wall installation - Brushed Durabrass (23kt Gold)
SERIES-VARIOUS

34 443 979
Product version from 5/1/2022



- 3/8" shower outlet
  - slide-on rosettes Ø 70 mm
  - 1/2" connection
  - gauge 150 mm - 13 mm
  - with volume control
  - WRAS
- Intrinsic protection against back flow.

	Brushed Durabrass (23kt Gold)	34 443 979-28
	Chrome	34 443 979-00
	Brushed Platinum	34 443 979-06
	Platinum	34 443 979-08
	Dark Chrome	34 443 979-19
	Matte Black	34 443 979-33
	Brushed Dark Brass	34 443 979-39
	Brushed Champagne (22kt Gold)	34 443 979-46
	Champagne (22kt Gold)	34 443 979-47
	Brushed Chrome	34 443 979-93
	Brushed Dark Platinum	34 443 979-99

Required miscellaneous



TARA Regulator handle - Brushed Durabrass (23kt Gold)
11 431 892-28

34 443 979 Product version from 5/1/2022

mm [inches]



Flow rate chart



## Codes & Standards

DIN 4109

EN 1717

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

Ü-Zeichen



## Shower thermostat for wall installation - Brushed Durabronz (23kt Gold)

SERIES-VARIOUS


34 443 979 Product version from 5/1/2022

### Certificates and sustainability

Belgaqua\_22\_281\_2 LGA\_29

WRAS\_2204

Parts for other  
finishes can be found  
here: [Chrome](#)

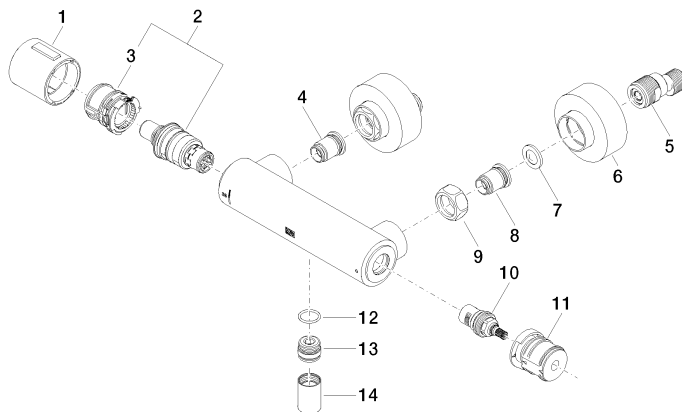

## Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
11	90 30 40 017 00 90	base	1.00	2
1	90 17 33 015 00-28	handle	1.00	20
6	90 31 20 512 00-28	rosette	2.00	20
3	90 30 40 010 00 90	regulator	1.00	2
2	90 15 02 070 00 90	cartridge	1.00	2
7	09 29 30 050 90	sieve	2.00	2
9	09 24 77 008-00	nut	2.00	10
4	04 31 20 530 00 90	insert	1.00	2
8	04 31 20 540 00 90	insert	1.00	2
5	04 11 04 030 00 90	connection	2.00	2
13	09 31 20 511-28	nipple	1.00	60
10	90 90 03 236 00 90	top	1.00	2
14	90 21 02 069 00-28	cover	1.00	20
12	90 14 10 010 00 90	seal	1.00	2