

35 427 970 90

Product version from 3/13/2017



- lead-free, dezincification resistant
- 2x back flow preventer
- 2x female thread 1/2" connections
- 3x outlet G 1/2"
- dust cover
- anti-water packing
- sound and thermal insulation
- gauge 70 mm
- suitable for xGRID (when using installation track + 12 mm recess depth)
- WRAS

Can only be combined with exposed trim parts 36

427 SSS-FF

Recommended miscellaneous



Drybox Concealed thermostat -

•Overflow is part of the scope of delivery.

39 426 970 90

Recommended miscellaneous



xGRID Attachment set for integrating in the dry wall construction -

12 340 970 90

Required miscellaneous



xGRID Installation track 555 mm -


12 360 970 90

Concealed thermostat -

SERIES-VARIOUS

35 427 970 90 Product version from 3/13/2017

mm [inches]

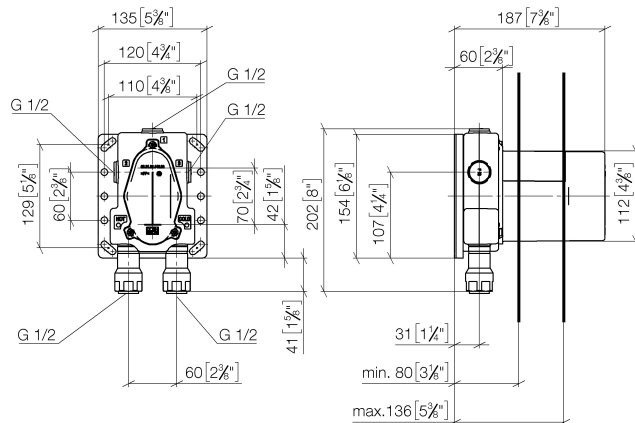

Codes & Standards

EN 1111

EN 1717

Scottish Water
Byelaws

UK Water Supply
Regulations

Certificates and sustainability

Belgaqua_22_279_2 DVGW_DW-
6512DN0

WRAS_1906

