





- red brass, lead-free
- 2x back flow preventer
- 2x female thread 3/4" connections
- 1x female thread 3/4" outlet for additional valves
- 3x female thread 3/4" outlet, right/left alternatively
- 4x dust cover
- 4x anti-water packing
- soundproofing
- gauge 120 mm
- suitable for xGRID (when using installation track + 12 mm recess depth)
- WRAS


Recommended miscellaneous

	<b>Drybox Thermostat module with 3 valves -</b>	39 531 970 90
---	---	---------------


Recommended miscellaneous

	<b>Extension 46 mm -</b>	12 178 970 90
--	--------------------------	---------------


Required miscellaneous

	<b>xGRID Installation track 555 mm -</b>	12 360 970 90
---	--	---------------

Recommended miscellaneous

	<b>Extension 28 mm -</b>	12 177 970 90
---	--------------------------	---------------

Recommended miscellaneous

	<b>xGRID Attachment set for integrating in the dry wall construction -</b>	12 340 970 90
--	--	---------------

35 531 970 90 Product version up to 11/25/2021



## Codes & Standards

EN 1111

EN 1717

Scottish Water  
Byelaws

UK Water Supply  
Regulations


XP P 41-280

## Certificates and sustainability

Belgaqua\_21-031-2 WRAS\_2011

ACS\_21 ACC LY

DVGW\_DW-  
6512DN0

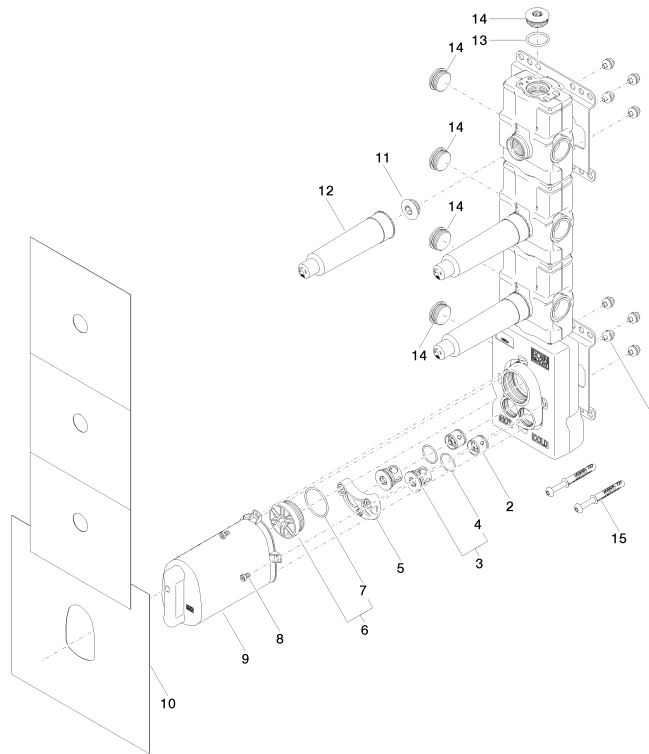

## Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
	8 09 30 30 112 90	screw	4.00	2
	3 04 21 34 077 00 90	nipple	2.00	2
	6 04 31 20 100 00 90	plug	1.00	2
	1 90 23 01 091 00 90	set	8.00	2
	15 04 30 31 054 00 90	fixing set	2.00	2
	13 09 14 10 009 90	seal	1.00	2
	7 09 14 10 111 90	seal	1.00	2
	12 09 21 02 173 90	cap	3.00	2
	14 09 31 20 003 90	plug	5.00	2
	4 09 14 10 098 90	seal	2.00	2
	2 90 23 01 045 00 90	back-flow preventer	2.00	2
	11 04 31 20 006 00 90	plug	3.00	2
	5 90 12 12 218 00 90	base	1.00	2
	9 04 21 02 174 01 90	cap	1.00	2
	10 04 14 03 073 07 90	gasket kit	1.00	2