









LISSÉ Concealed thermostat with two function volume control - Brushed Dark Platinum

LISSÉ


36 426 845
Product version from 6/30/2022



- rotary diverter with volume control and shut-off function
- cover plate 150 x 90 mm
- temperature control handle with safety limit stop at 38°C
- hot water temperature limiter, can be preset
- WRAS

	Brushed Dark Platinum	36 426 845-99
	Chrome	36 426 845-00
	Brushed Platinum	36 426 845-06
	Dark Chrome	36 426 845-19
	Brushed Light Gold	36 426 845-27
	Matte Black	36 426 845-33
	Brushed Chrome	36 426 845-93

Recommended miscellaneous



xGRID Attachment set for integrating in the dry wall construction -
12 340 970 90

Required miscellaneous




xGRID Installation track 555 mm -
12 360 970 90

LISSÉ Concealed thermostat with two function volume control - Brushed Dark Platinum

LISSÉ

36 426 845 Product version from 6/30/2022
mm [inches]

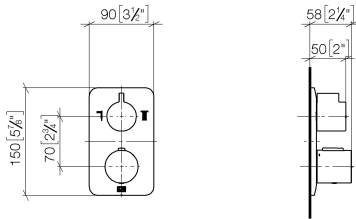

Flow rate chart



Codes & Standards

DIN 4109

EN 1111

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen

VA-Zeichen



LISSE Concealed thermostat with two function volume control - Brushed Dark
Platinum

LISSE

36 426 845 Product version from 6/30/2022

Certificates and sustainability

LGA_19	ETA_20	DVGW_DW-6512DN0	LGA_19	WRAS_250402
--------	--------	-----------------	--------	-------------

LISSÉ Concealed thermostat with two function volume control - Brushed Dark Platinum

LISSÉ

36 426 845 Product version from 6/30/2022

