

xTOOL Concealed thermostat without volume control 3/4" - Brushed Light Gold SERIES SPECIFIC

36 503 985 Product version from 9/1/2022



- cover plate 120 x 120 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge
- WRAS

| | | |
|--|--------------------------------|---------------|
| | Brushed Light Gold | 36 503 985-27 |
| | Chrome | 36 503 985-00 |
| | Brushed Platinum | 36 503 985-06 |
| | Platinum | 36 503 985-08 |
| | Dark Chrome | 36 503 985-19 |
| | Brushed Durabronze (23kt Gold) | 36 503 985-28 |
| | Matte Black | 36 503 985-33 |
| | Brushed Champagne (22kt Gold) | 36 503 985-46 |
| | Champagne (22kt Gold) | 36 503 985-47 |
| | Brushed Chrome | 36 503 985-93 |
| | Brushed Dark Platinum | 36 503 985-99 |

Required miscellaneous



xTOOL Concealed thermostat module without volume control - 35 503 970 90

- min. recess depth 95 mm
- max. recess depth 160 mm

Recommended miscellaneous



xGRID Attachment set for integrating in the dry wall construction - 12 340 970 90

Required miscellaneous



xGRID Installation track 555 mm - 12 360 970 90


xTOOL Concealed thermostat without volume control 3/4" - Brushed Light Gold

SERIES SPECIFIC


36 503 985

Product version from 9/1/2022

mm [inches]

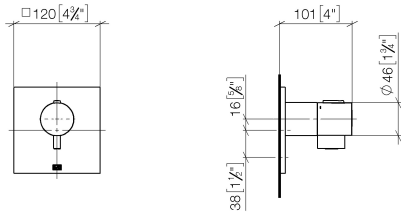

Flow rate chart

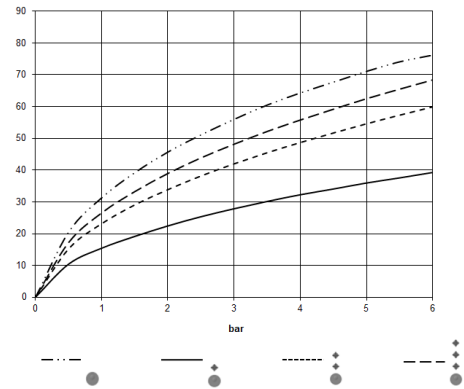

| Codes & Standards | | | |
|-----------------------------|-----------|----------|------------------------|
| DIN 4109 | EN 1111 | ISO 3822 | Scottish Water Byelaws |
| UK Water Supply Regulations | Ü-Zeichen | | |



xTOOL Concealed thermostat without volume control 3/4" - Brushed Light Gold SERIES SPECIFIC

36 503 985 Product version from 9/1/2022

Certificates and sustainability

| | | |
|-----------|---------------------|--------|
| WRAS_2011 | DVGW_DW- 6512DN0 | LGA_29 |
|-----------|---------------------|--------|

xTOOL Concealed thermostat without volume control 3/4" - Brushed Light Gold SERIES SPECIFIC

36 503 985 Product version from 9/1/2022

