


## WATER BAR Concealed body spray FlowReduce - Dark Chrome

SERIES-VARIOUS

36 517 979



- HORIZONTAL RAIN, max. flow rate 6 l/min (at 3 bar)
- Function from: l/min
- with anti-scale system
- cover plate 240 x 60 mm
- 1/2" connection

### Notes:

- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

|  |                                |               |
|--|--------------------------------|---------------|
|  | Dark Chrome                    | 36 517 979-19 |
|  | Chrome                         | 36 517 979-00 |
|  | Brushed Platinum               | 36 517 979-06 |
|  | Platinum                       | 36 517 979-08 |
|  | Light Gold                     | 36 517 979-26 |
|  | Brushed Light Gold             | 36 517 979-27 |
|  | Brushed Durabronze (23kt Gold) | 36 517 979-28 |
|  | Matte Black                    | 36 517 979-33 |
|  | Brushed Dark Brass             | 36 517 979-39 |
|  | Brushed Bronze                 | 36 517 979-42 |
|  | Brushed Champagne (22kt Gold)  | 36 517 979-46 |
|  | Champagne (22kt Gold)          | 36 517 979-47 |
|  | Brushed Chrome                 | 36 517 979-93 |
|  | Brushed Dark Platinum          | 36 517 979-99 |

### Required miscellaneous



- Concealed wall installation box -** 35 206 970 90
- max. recess depth 173 mm
  - min. recess depth 100 mm

### Recommended miscellaneous



- xGRID Attachment set for integrating in the dry wall construction -** 12 340 970 90


### Required miscellaneous




- xGRID Installation track 555 mm -** 12 360 970 90

36 517 979

mm [inches]

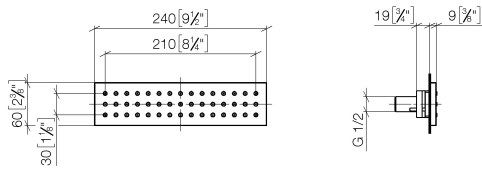

**Flow rate chart**

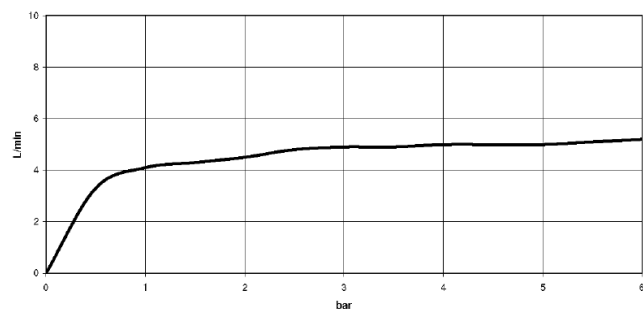

**Trajectory diagram**



## Codes & Standards

DIN 4109

ISO 3822

Ü-Zeichen



## WATER BAR Concealed body spray FlowReduce - Dark Chrome

---

SERIES-VARIOUS

36 517 979

Certificates and sustainability

---

LGA\_19

