


SERENITY SKY Rain panel for recessed ceiling installation with light - Brushed Champagne (22kt Gold) SERIES-VARIOUS

41 771 979 Product version from 9/1/2024



- exposed trim parts
- Rain panel with 2 different spray modes
- PURIFY RAIN, 175 x 175 mm, max. flow rate 10 l/min (at 3 bar)
- FULL RAIN, 455 x 315 mm, max. flow rate 14 l/min (at 3 bar)
- with anti-scale system

Technical data:

- Rain panel, 600 x 420 mm
- min. recess depth 150 mm
- weight 15kg
- Recommended control element: xTool

Electric:

Ceiling module power supply

- 24V DC (CV)

Ambient lighting

- LED coloured light RGBW
- Bulbs protected against splashing water

Activation

- ZigBee Light Link RGBW controller
- Provided by customer: Zigbee gateway

Environment

technical data:







- Not suitable for outdoor use.
- Not suitable for use in a steam room.
- Not suitable for use in chlorinated or salty environments.
- Comply with the protection zone regulations as defined in DIN VDE 0100, Part 701 (IEC 60364-7-701).

Sanitary:

- recommended water hardness: 6-7 °dH - if the water is harder, integrate a water softener that uses the ion exchange principle into the feed pipe.
- for choosing the drainage, taking into consideration the discharge of all the products in the shower, the specific demand needs to be assessed.
Recommendation: Floor drain (connected rating) = 1l/sec, drainage rate DN 50
- feed pipe (hot/cold): 2x DN 20
- For the optimum choice of hot water storage device - taking into consideration additional drawing-off points and the frequency with which the rain panels are used - the specific demand needs to be assessed

Notes:

- Dornbracht recommends consulting a systems integrator.

| | | |
|---|-------------------------------|---------------|
|  | Brushed Champagne (22kt Gold) | 41 771 979-46 |
|  | Chrome | 41 771 979-00 |
|  | Dark Chrome | 41 771 979-19 |
|  | Brushed Bronze | 41 771 979-42 |
|  | Champagne (22kt Gold) | 41 771 979-47 |
|  | Brushed Stainless Steel | 41 771 979-86 |
|  | Brushed Dark Platinum | 41 771 979-99 |



SERENITY SKY Rain panel for recessed ceiling installation with light - Brushed Champagne (22kt Gold) SERIES-VARIOUS

41 771 979 Product version from 9/1/2024

Required miscellaneous



SERENITY SKY Concealed ceiling 35 771 970 90


installation box with light -

- concealed rough parts
- flush-mounted reflection box, 662 x 482 mm, RAL 9003, Signal White
- 2x female thread 1/2" connections
- min. recess depth 150 mm
- weight 15kg
- Supply pipe 7 m
- Input 100-240V AC 50-60Hz
- Output 24V DC SELV / Class 2
- ZigBee Light Link RGBW controller
- Provided by customer: Zigbee gateway




SERENITY SKY Rain panel for recessed ceiling installation with light - Brushed SERIES-VARIOUS
Champagne (22kt Gold)

41 771 979 Product version from 9/1/2024
mm [inches]
1:10

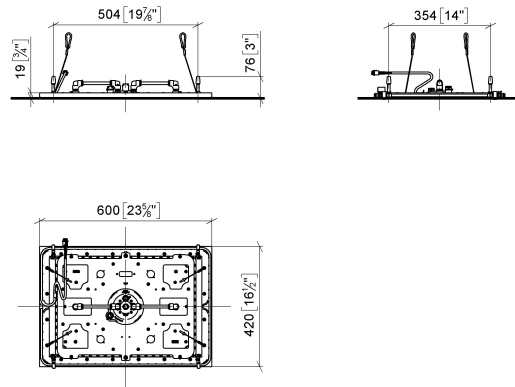

Flow rate chart

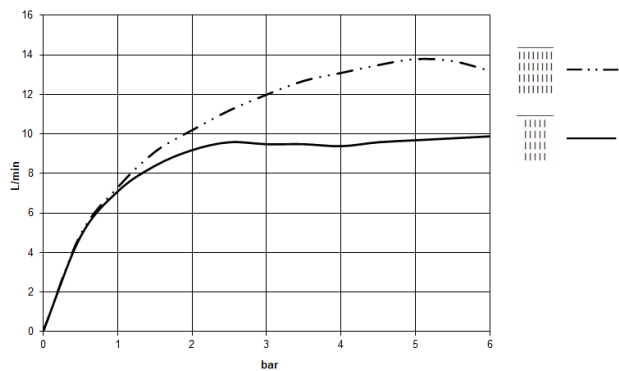

Codes & Standards

| | | | |
|----------|----------|---------------------------|--------------------------------|
| DIN 4109 | ISO 3822 | Scottish Water Byelaws | UK Water Supply Regulations |
|----------|----------|---------------------------|--------------------------------|

Ü-Zeichen



SERENITY SKY Rain panel for recessed ceiling installation with light - Brushed Champagne (22kt Gold) SERIES-VARIOUS

41 771 979 Product version from 9/1/2024


Certificates and sustainability

LGA_38

WRAS_250102

SERENITY SKY Rain panel for recessed ceiling installation with light - Brushed
SERIES-VARIOUS
Champagne (22kt Gold)

41 771 979
Product version from 9/1/2024

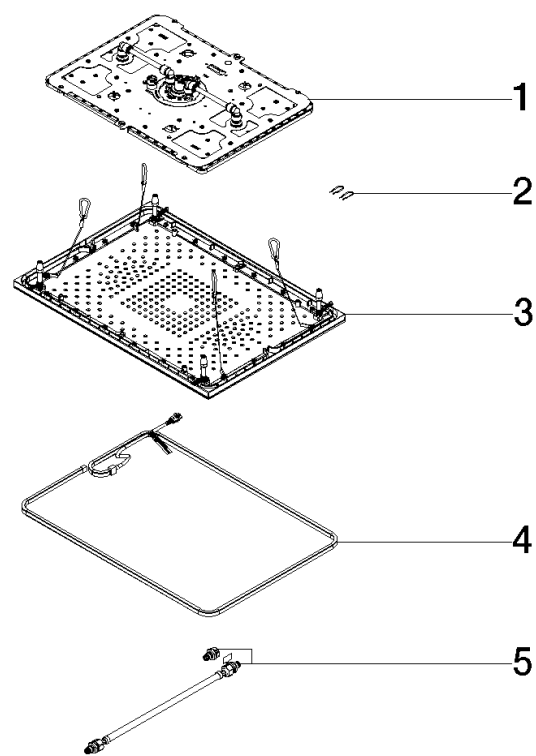

Spare parts list

| No. | Item Number | Name | Quantity used | Delivery time |
|-----|--------------------|------------------------|---------------|---------------|
| 2 | 91 16 02 053 00 90 | holder | 1.00 | 2 |
| 5 | 90 30 04 033 00 90 | hose | 1.00 | 2 |
| 3 | 90 12 05 106 00-46 | cover | 1.00 | 30 |
| 4 | 90 10 01 263 00 90 | electronic accessories | 1.00 | 2 |
| 1 | 90 12 01 095 02 90 | shower | 1.00 | 2 |