


## SERENITY SKY+ Rain panel for recessed ceiling installation with light - Brushed Stainless Steel

41 781 979 Product version from 9/1/2024



- exposed trim parts
- Rain panel with 5 different flow modes
- Rain panel, 600 x 420 mm
- PURIFY RAIN, 175 x 175 mm, max. flow rate 10 l/min (at 3 bar)
- FULL RAIN, 455 x 315 mm, max. flow rate 14 l/min (at 3 bar)
- LAMINAR FLOW, max. flow rate 10 l/min (at 3 bar)
- AQUAPRESSURE FLOW, max. flow rate 9.4 l/min (at 3 bar)
- COOL MIST, max. flow rate 1 l/min (at 3 bar)
- min. recess depth 150 mm
- weight 15kg
- feed pipe (hot/cold): 2x DN 20
- with anti-scale system
- Recommended control element: xTool

### Ceiling module power supply

- 24V DC (CV)

### Ambient lighting

- LED coloured light RGBW
- Bulbs protected against splashing water

### Activation








- ZigBee Light Link RGBW controller
- Provided by customer: Zigbee gateway

### Environment

- Not suitable for outdoor use.
- Not suitable for use in a steam room.
- Not suitable for use in chlorinated or salty environments.
- Comply with the protection zone regulations as defined in DIN VDE 0100, Part 701 (IEC 60364-7-701).
- Dornbracht recommends consulting a systems integrator.

### includes light bulbs with a Class G energy efficiency

includes light bulbs with a Class G energy efficiency

	Brushed Stainless Steel	41 781 979-86
	Chrome	41 781 979-00
	Dark Chrome	41 781 979-19
	Brushed Bronze	41 781 979-42
	Brushed Champagne (22kt Gold)	41 781 979-46
	Champagne (22kt Gold)	41 781 979-47
	Brushed Dark Platinum	41 781 979-99

## Required miscellaneous




### SERENITY SKY+ Concealed ceiling installation box with light - 35 781 970 90


- concealed rough parts
- 2x female thread 1/2" connections
- flush-mounted reflection box, 662 x 482 mm, RAL 9003, Signal White
- min. recess depth mm
- weight 15kg
- Supply pipe 7 m
- Input 100-240V AC 50-60Hz
- Output 24V DC SELV / Class 2
- ZigBee Light Link RGBW controller
- Provided by customer: Zigbee gateway

**SERENITY SKY+ Rain panel for recessed ceiling installation with light -  
Brushed Stainless Steel**

41 781 979 Product version from 9/1/2024  
mm [inches]  
1:10

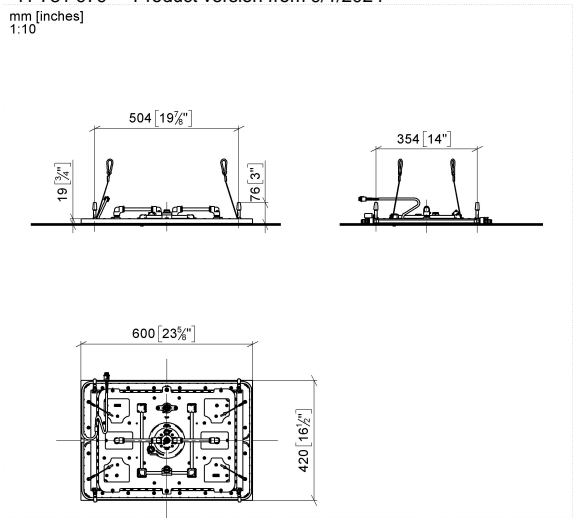

**Flow rate chart**

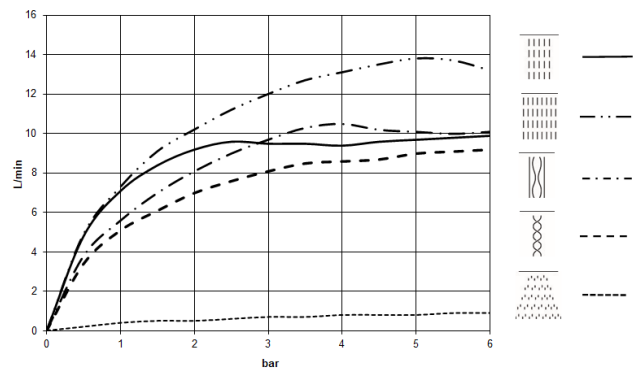

**Codes & Standards**

DIN 4109	ISO 3822	Scottish Water Byelaws	UK Water Supply Regulations
----------	----------	---------------------------	--------------------------------

**Ü-Zeichen**



## SERENITY SKY+ Rain panel for recessed ceiling installation with light - Brushed Stainless Steel

---

41 781 979 Product version from 9/1/2024

### Certificates


---

LGA\_38

WRAS\_250102

SERENITY SKY+ Rain panel for recessed ceiling installation with light -  
Brushed Stainless Steel

41 781 979    Product version from 9/1/2024

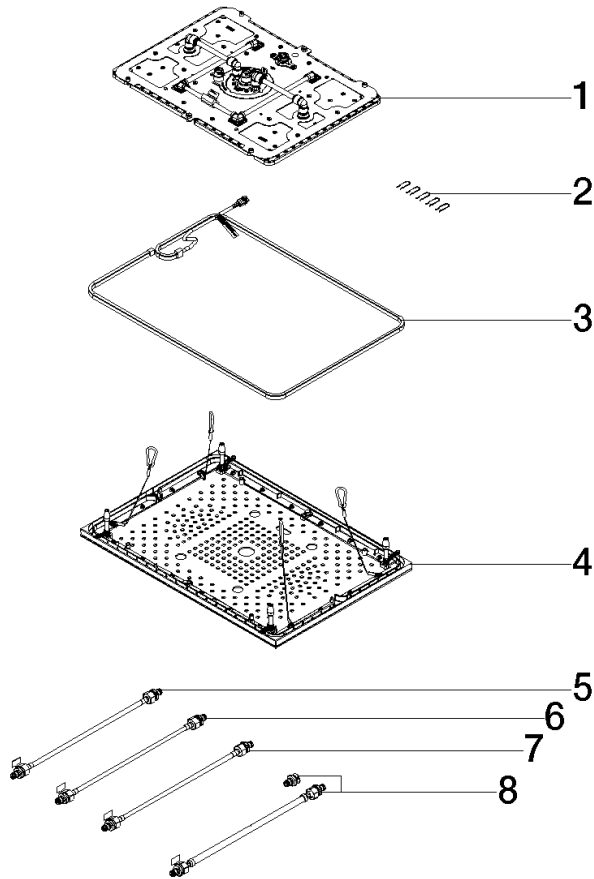

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 12 01 095 00 90	shower	1	2
2	91 16 02 053 00 90	holder	1	2
3	90 10 01 263 00 90	electronic accessories	1	2
4	90 12 05 106 00-86	cover	1	30
5	90 30 04 096 01 90	hose	1	-
Spare part can no longer be ordered, please order the replacement item				
6	90 30 04 096 02 90	hose	1	-
Spare part can no longer be ordered, please order the replacement item				
7	90 30 04 096 03 90	hose	1	-
Spare part can no longer be ordered, please order the replacement item				
8	90 30 04 033 00 90	hose	1	2