

13 801 660



- 200mm projection
- circular normal flow
- rosette Ø 60 mm
- hole diameter 37 mm
- 1/2" connection
- max. flow 24.6 l/min at 3 bar flow pressure

|   |                               |               |
|---|-------------------------------|---------------|
|    | Brushed Bronze                | 13 801 660-42 |
|    | Chrome                        | 13 801 660-00 |
|    | Brushed Platinum              | 13 801 660-06 |
|    | Dark Chrome                   | 13 801 660-19 |
|    | Light Gold                    | 13 801 660-26 |
|    | Brushed Light Gold            | 13 801 660-27 |
|    | Matte Black                   | 13 801 660-33 |
|    | Brushed Champagne (22kt Gold) | 13 801 660-46 |
|    | Champagne (22kt Gold)         | 13 801 660-47 |
|   | Brushed Chrome                | 13 801 660-93 |
|  | Brushed Dark Platinum         | 13 801 660-99 |

**Recommended miscellaneous**

- Concealed wall elbow -** 35 085 970 90
- min. recess depth 90 mm
  - max. recess depth 163 mm




13 801 660

mm [inches]



**Flow rate chart**

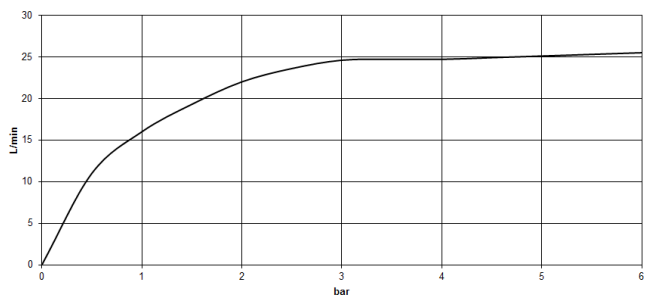

13 801 660

