

#### 17 861 680



<ul> <li>145mm projection</li> <li>rigid, thermally insulated spout</li> <li>laminar flow</li> <li>height of mixer 233 mm</li> <li>height up to laminar flow regulator 213 mm</li> <li>hole diameter 35 mm</li> <li>provides filtered, hot water up to 93°C</li> <li>provides filtered, cold water</li> <li>max. flow 2 l/min at 3 bar flow pressure</li> <li>ready-to-use control unit for wall mounting (137mm x 159mm x 60mm)</li> <li>electronic magnetic valve</li> <li>100-230 V, 50-60 Hz, 18 W power supply unit, incl. country-specific adapter set</li> <li>lead-free</li> <li>Spout ring cannot be removed.</li> <li>This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB</li> <li>A minimum flow pressure of 3 bar is necessary for the HOT &amp; COLD WATER DISPENSER to work perfectly in conjunction with a hot water tank and filter.</li> <li>In addition, the installation must be above a kitchen sink.</li> <li>The filter cartridge must be changed every six months. The installation instructions contain further information for guidance.</li> <li>Detailed planning information and technical data can be found at www.dornbracht.com/professional</li> </ul>	
A minimum flow pressure of 3 bar is necessary for the HOT & COLD WATER DISPENSER to work perfectly in conjunction with a hot water tank and filter.	
In addition, the installation must be above a kitchen sink.	
The filter cartridge must be changed every six months. The installation instructions contain further information for guidance.	

Detailed planning information and technical data can be found at www.dornbracht.com/professional

#### Required miscellaneous




Hot water tank incl. filter -

12 892 970 90


	Dark Chrome	17 861 680-19
m	Chrome	17 861 680-00
	Brushed Platinum	17 861 680-06
	Platinum	17 861 680-08
	Brushed Durabrass (23kt Gold)	17 861 680-28
	Brushed Champagne (22kt Gold)	17 861 680-46
	Champagne (22kt Gold)	17 861 680-47
,	Brushed Dark Platinum	17 861 680-99



#### 17 861 680

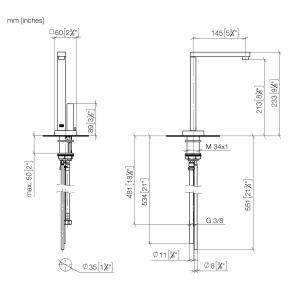

### Flow rate chart

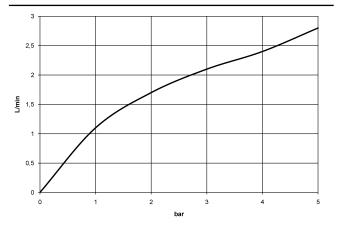

### Codes & Standards

NSF372

NSF61




17 861 680

### Certificates

IAPMO\_N-4 IAPMO\_6



17 861 680

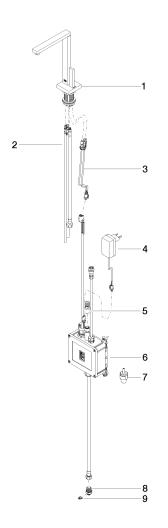



17 861 680

### Spare parts list