

#### 17 861 680



•	145n	nm	pro	ject	ion
-	al aci al	46.	-	~II. /	

- rigid, thermally insulated spout
- laminar flow
- height of mixer 233 mmheight up to laminar flow regulator 213 mm
- hole diameter 35 mm
- provides filtered, hot water up to 93°C
- provides filtered, cold water
- max. flow 2 l/min at 3 bar flow pressure
- ready-to-use control unit for wall mounting (137mr
- x 159mm x 60mm)
- electronic magnetic valve
- 100-230 V, 50-60 Hz, 18 W power supply unit, incl. country-specific adapter set
- lead-free
- Spout ring cannot be removed.
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- e.g. LEED®, BREEAM®, DGNB A minimum flow pressure of 3 bar is necessary for the HOT & COLD WATER DISPENSER to
- for the HOT & COLD WATER DISPENSER to work perfectly in conjunction with a hot water tank and filter.
- In addition, the installation must be above a kitchen sink.

The filter cartridge must be changed every six months. The installation instructions contain further information for guidance. Detailed planning information and technical data can be found at www.dornbracht.com/professional

A minimum flow pressure of 3 bar is necessary for the HOT & COLD WATER DISPENSER to work perfectly in conjunction with a hot water tank and filter.

In addition, the installation must be above a kitchen sink.

The filter cartridge must be changed every six months. The installation instructions contain further information for guidance.

Detailed planning information and technical data can be found at www.dornbracht.com/professional

#### Required miscellaneous




Hot water tank incl. filter -

12 892 970 90


	Brushed Champagne (22kt Gold)	17 861 680-46
	Chrome	17 861 680-00
	Brushed Platinum	17 861 680-06
m	Platinum	17 861 680-08
cl.	Dark Chrome	17 861 680-19
	Brushed Durabrass (23kt Gold)	17 861 680-28
	Champagne (22kt Gold)	17 861 680-47
/	Brushed Dark Platinum	17 861 680-99



17 861 680

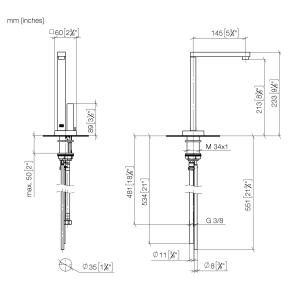

### Flow rate chart

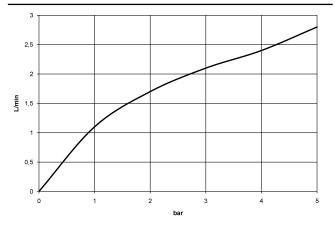

### Codes & Standards

NSF372

NSF61



17 861 680


### Certificates

IAPMO\_N-4 IAPMO\_6



17 861 680

### Product version from 5/28/2022

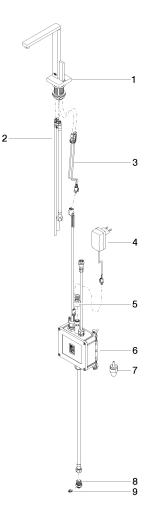



17 861 680

## Spare parts list

Product version from 5/28/2022