

**Rain shower for surface-mounted ceiling installation 300 mm - Brushed Durabronz (23kt Gold)**

TARA

28 031 970



Fits: TARA, LISSÉ, VAIA, META

- rain shower Ø 300 mm
- PURE RAIN, max. flow rate 12 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- Distance to ceiling from bottom edge of shower 40 mm
- with anti-scale system
- For simultaneous control of the jet types, we recommend the xTool thermostat module
- WRAS 240502006

	Brushed Durabronz (23kt Gold)	28 031 970-28
	Chrome	28 031 970-00
	Brushed Platinum	28 031 970-06
	Platinum	28 031 970-08
	Dark Chrome	28 031 970-19
	Light Gold	28 031 970-26
	Brushed Light Gold	28 031 970-27
	Matte Black	28 031 970-33
	Brushed Bronze	28 031 970-42
	Brushed Champagne (22kt Gold)	28 031 970-46
	Champagne (22kt Gold)	28 031 970-47
	Brushed Chrome	28 031 970-93
	Brushed Dark Platinum	28 031 970-99

**Required miscellaneous**




**Concealed ceiling installation box 35 041 970 90 with ceiling fixing -**

- min. recess depth 90 mm
- max. recess depth 115 mm
- 2x female thread 1/2" outlet
- concealed rough parts


**Rain shower for surface-mounted ceiling installation 300 mm - Brushed  
Durabronz (23kt Gold)**

TARA

28 031 970  
mm [Inches]

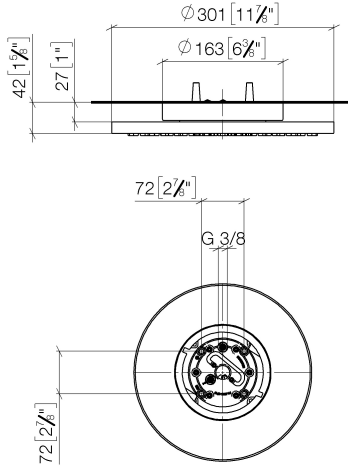

**Flow rate chart**

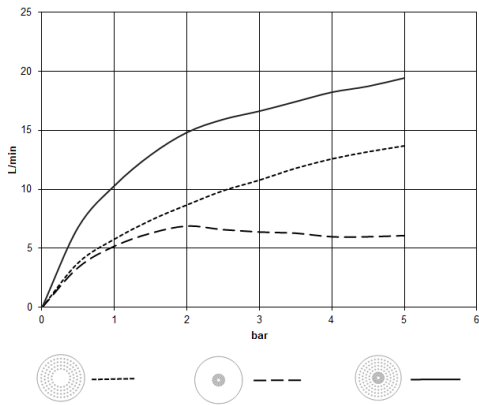

**Codes & Standards**

DIN 4109

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

**Ü-Zeichen**



Rain shower for surface-mounted ceiling installation 300 mm - Brushed  
Durabronze (23kt Gold)

---

TARA

28 031 970  
Certificates


---

LGA\_38

WRAS\_240502

28 031 970

**Product version from 5/1/2022**

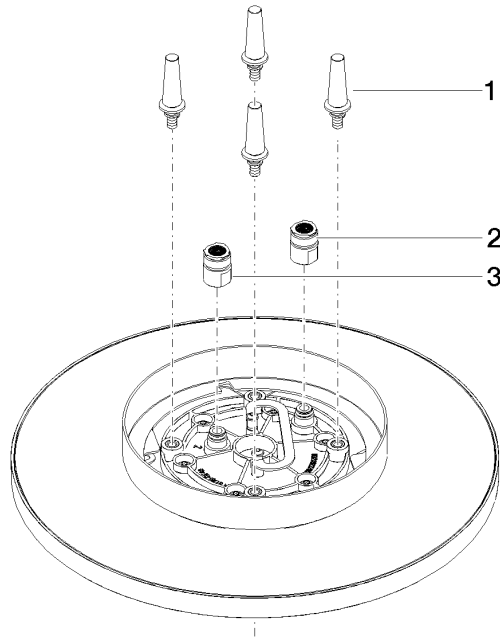



Rain shower for surface-mounted ceiling installation 300 mm - Brushed  
Durabronze (23kt Gold)

TARA

28 031 970

**Spare parts list**

**Product version from 5/1/2022**

No.	Item Number	Name	Quantity used	Delivery time
	90 17 20 263 00 90	fixing set	3	2