

## Rain shower for surface-mounted ceiling installation with light 300 mm - Brushed Light Gold

#### 28 032 970




Fits: TARA, LISSÉ, VAIA, META

- rain shower Ø 300 mm
- PURE RAIN, max. flow rate 12 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- Distance to ceiling from bottom edge of shower 40
  mm
- with anti-scale system
- central LED Spot 3000 K
- Provided by customer: Light switch
- For simultaneous control of the jet types, we
  recommend the xTeel thermestat module
- recommend the xTool thermostat module
  Not suitable for use in a steam room.
  WRAS 240502006
- includes light bulbs with a Class F energy efficiency

includes light bulbs with a Class F energy efficiency


	Brushed Light Gold	28 032 970-27
)	Chrome	28 032 970-00
	Brushed Platinum	28 032 970-06
	Platinum	28 032 970-08
	Dark Chrome	28 032 970-19
	Light Gold	28 032 970-26
	Brushed Durabrass (23kt Gold)	28 032 970-28
	Matte Black	28 032 970-33
	Brushed Bronze	28 032 970-42
	Brushed Champagne (22kt Gold)	28 032 970-46
	Champagne (22kt Gold)	28 032 970-47
	Brushed Chrome	28 032 970-93
	Brushed Dark Platinum	28 032 970-99

#### Required miscellaneous






# Rain shower for surface-mounted ceiling installation with light 300 mm - Brushed Light Gold



#### Flow rate chart



#### Codes & Standards

DIN 4109

Scottish Water Byelaws UK Water Supply Regulations

Ü-Zeichen

ISO 3822



Rain shower for surface-mounted ceiling installation with light 300 mm -Brushed Light Gold

28 032 970 Certificates


LGA\_38 WRAS\_240502



Rain shower for surface-mounted ceiling installation with light 300 mm -Brushed Light Gold

28 032 970

**Product version from 5/1/2022** 

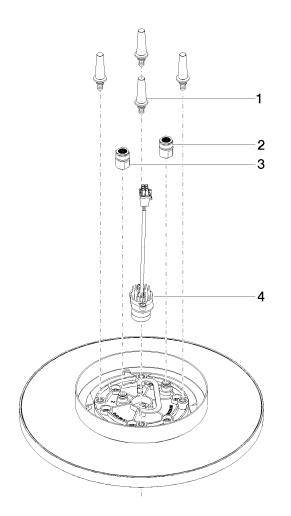



Rain shower for surface-mounted ceiling installation with light 300 mm - Brushed Light Gold

28 032 970

## Spare parts list

### Product version from 5/1/2022

No.	Item Number	Name	Quantity used	Delivery time
	90 17 20 263 00 90	fixing set	4	2