

28 044 980 Product version from 5/1/2022



- rain shower 300 x 240mm
- PURE RAIN, max. flow rate 12 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- min. recess depth 137 mm
- with anti-scale system

## Ceiling module power supply

• 12V DC (CV)

### Spot lighting

- LED coloured light RGBW
- Bulbs protected against splashing water

### **Ambient lighting**

- LED coloured light RGBW
- Bulbs protected against splashing water

#### Activation

- ZigBee Light Link RGBW controller
- Provided by customer: Zigbee gateway

#### **Environment**

- Not suitable for outdoor use.
- Not suitable for use in a steam room.
- Not suitable for use in chlorinated or salty environments.
- Comply with the protection zone regulations as defined in DIN VDE 0100, Part 701 (IEC 60364-7-
- Dornbracht recommends consulting a systems integrator.
- WRAS

#### includes light bulbs with a Class G energy efficiency

includes light bulbs with a Class G energy efficiency

## Required miscellaneous




### Concealed ceiling installation box 35 044 970 90 for recessed ceiling installation with light -

- •flush-mounted installation box 360x 300 mm RAL 9003 signal white
- •recess depth mm
- •Input 100-240V AC 50-60Hz
- •concealed rough parts
- Output 12V DC SELV / Class 2
- •ZigBee Light Link RGBW controller


Platinum	28 044 980-08
Chrome	28 044 980-00
Brushed Platinum	28 044 980-06
Dark Chrome	28 044 980-19
Brushed Light Gold	28 044 980-27
Brushed Durabrass (23kt Gold)	28 044 980-28
Matte Black	28 044 980-33
Brushed Champagne (22kt Gold)	28 044 980-46
Champagne (22kt Gold)	28 044 980-47
Brushed Chrome	28 044 980-93
Brushed Dark Platinum	28 044 980-99



28 044 980 Product version from 5/1/2022



## Flow rate chart



## Codes & Standards

DIN 4109 ISO 3822 Scottish Water UK Water Supply Byelaws Regulations

Ü-Zeichen




28 044 980 Product version from 5/1/2022

Certificates

LGA\_38 WRAS\_240502



28 044 980 Product version from 5/1/2022

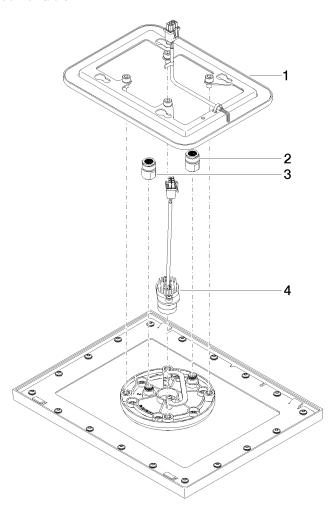

## Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 10 01 224 00 90	electronic accessories	1	2
2	90 24 03 309 01 90	connection	1	2
3	90 24 03 309 00 90	connection	1	2
4	90 10 01 225 00 90	electronic accessories	1	2