









36 426 970 Product version up to 8/24/2020



- rotary diverter with volume control and shut-off function
- cover plate Ø 150 mm
- temperature control handle with safety limit stop at 38°C
- hot water temperature limiter, can be preset
- WRAS

| | | |
|---|-------------------------------|---------------|
|  | Brushed Platinum | 36 426 970-06 |
|  | Chrome | 36 426 970-00 |
|  | Platinum | 36 426 970-08 |
|  | Dark Chrome | 36 426 970-19 |
|  | Light Gold | 36 426 970-26 |
|  | Brushed Light Gold | 36 426 970-27 |
|  | Brushed Durabrass (23kt Gold) | 36 426 970-28 |
|  | Matte Black | 36 426 970-33 |
|  | Brushed Bronze | 36 426 970-42 |
|  | Brushed Champagne (22kt Gold) | 36 426 970-46 |
|  | Champagne (22kt Gold) | 36 426 970-47 |
|  | Brushed Chrome | 36 426 970-93 |
|  | Brushed Dark Platinum | 36 426 970-99 |

Required miscellaneous



Concealed thermostat with built-in isolators - 35 426 970 90
 •max. recess depth 136 mm
 •min. recess depth 80 mm

Recommended miscellaneous



xGRID Attachment set for integrating in the dry wall construction - 12 340 970 90

Required miscellaneous



Concealed thermostat - 35 425 970 90
 •max. recess depth 136 mm
 •min. recess depth 80 mm


Required miscellaneous




xGRID Installation track 555 mm - 12 360 970 90

36 426 970 Product version up to 8/24/2020

mm [inches]

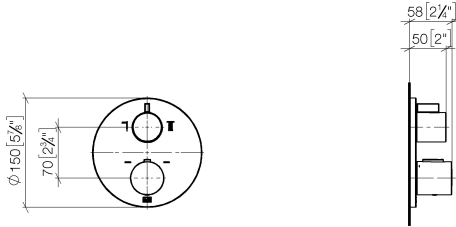

Flow rate chart

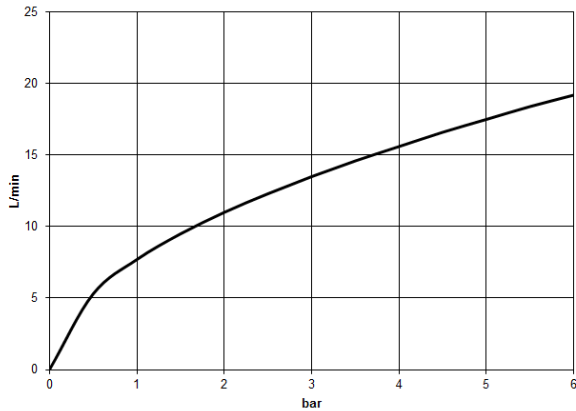

Codes & Standards

| | | | |
|-----------------------------|-----------|------------|------------------------|
| DIN 4109 | EN 1111 | ISO 3822 | Scottish Water Byelaws |
| UK Water Supply Regulations | Ü-Zeichen | VA-Zeichen | XP P 41-280 |



Concealed thermostat with two function volume control - Brushed Platinum

SERIES SPECIFIC

36 426 970 Product version up to 8/24/2020

Certificates and sustainability

ACS_20 ACC LY

LGA_19


ETA_20

DVGW_DW-
6512DN0

LGA_19

WRAS_250402

36 426 970 Product version up to 8/24/2020

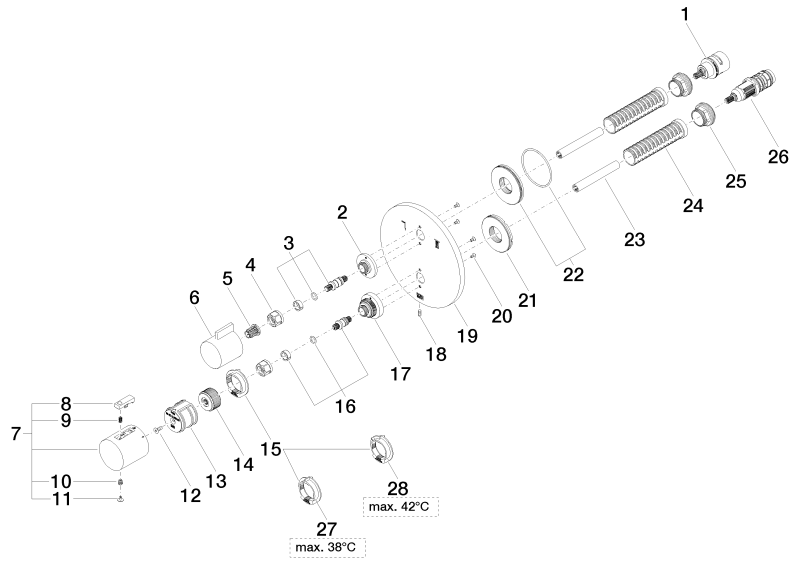



Concealed thermostat with two function volume control - Brushed Platinum

SERIES SPECIFIC

36 426 970 Product version up to 8/24/2020

Spare parts list

| No. | Item Number | Name | Quantity used | Delivery time |
|-----|--------------------|------------|---------------|---------------|
| 6 | 09 20 67 006-06 | handle | 1.00 | 10 |
| 2 | 09 12 12 053-06 | base | 1.00 | 10 |
| 21 | 09 30 01 296 90 | disc | 1.00 | 2 |
| 20 | 09 30 30 157 90 | screw | 4.00 | 2 |
| 15 | 09 28 10 143 90 | regulator | 1.00 | 60 |
| 17 | 09 12 12 051-06 | base | 1.00 | 10 |
| 5 | 90 12 12 002 00 90 | fixing cap | 1.00 | 2 |
| 18 | 09 31 11 134 90 | pin | 1.00 | 2 |
| 14 | 09 12 12 054 90 | base | 1.00 | 2 |
| 28 | 09 28 10 151 90 | regulator | 1.00 | 60 |
| 22 | 90 30 01 190 00 90 | disc | 1.00 | 2 |
| 9 | 90 16 02 027 00 90 | spring | 1.00 | 2 |
| 27 | 09 28 10 150 90 | regulator | 1.00 | 60 |
| 26 | 90 15 02 012 00 90 | cartridge | 1.00 | 60 |
| 1 | 90 90 03 163 00 90 | diverter | 1.00 | 2 |
| 7 | 90 17 33 004 00-06 | handle | 1.00 | 10 |
| 19 | 09 11 02 243-06 | plate | 1.00 | 10 |
| 25 | 09 24 04 257 90 | nut | 2.00 | 2 |
| 4 | 90 23 30 023 00 90 | nut | 2.00 | 2 |
| 13 | 90 12 12 052 00 90 | base | 1.00 | 2 |
| 16 | 04 29 06 024 01-00 | spindle | 1.00 | 10 |
| 10 | 90 30 30 136 00 90 | screw | 1.00 | 2 |
| 3 | 04 29 06 111 01-00 | spindle | 1.00 | 10 |
| 12 | 90 30 30 124 00 90 | screw | 1.00 | 2 |
| 11 | 90 31 20 049 00-13 | plug | 1.00 | 30 |
| 24 | 90 18 40 077 01 90 | spindle | 2.00 | 2 |
| 23 | 90 23 01 124 00 90 | sleeve | 2.00 | 2 |
| 8 | 90 21 33 011 00-13 | handle | 1.00 | 2 |