

36 707 811



- 160mm projection
- fixed spout
- rectangular, air-enriched flow
- hole diameter valve 37 mm
- hole diameter spout 37 mm
- handle Ø 60mm
- max. flow 4.5 l/min
- lead-free
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
  WRAS 2111006


NOTE: The handle inserts must be ordered separately from the fittings!

Brushed Bronze	36 707 811-42
Chrome	36 707 811-00
Brushed Platinum	36 707 811-06
Dark Chrome	36 707 811-19
Brushed Durabrass (23kt Gold)	36 707 811-28
Platinum / Brushed Platinum	36 707 811-36
Durabrass / Brushed Durabrass (23kt Gold)	36 707 811-38
Brushed Dark Platinum	36 707 811-99




36 707 811

mm [inches]



#### Flow rate chart



#### Codes & Standards

NSF372

NSF61



CYO

36 707 811

Certificates


IAPMO\_6397

IAPMO\_N-4976



36 707 811

Parts for other finishes can be found here: Chrome

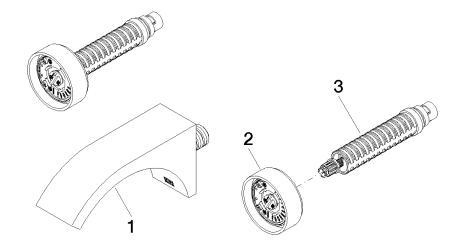





36 707 811

## **Spare parts list**