

ST 010 107 3980



- 165mm projection
- fixed spout
- circular, air-enriched flow
- height of mixer 230 mm
- height up to aerator 205 mm
- hole diameter 35 mm
- 2x screw-in M 10 x 1 pressure hose, leak-tested
- 1/2" connection
- max. flow 7 l/min
- lead-free
- automatic hygiene flush
- suitable for thermal disinfection
- adjustable follow-up time
- high-frequency sensors with self-calibration
- magnetic valve
- temperature setting via thermostat
- 100-240 V AC / 12 V DC, 50-60 Hz, 18 W power supply unit, incl. country-specific adapter set

 Cannot be combined with basins in conducting materials (e.g. steel. river stone).

 Cannot be combined with basins that have a closing drain.
 ATTENTION: Separate terms and conditions for electronic articles are applicable.

Individual components of this set

You need the following components for this set



42 765 970 90



13 721 980-00





ST 010 107 3980



Fits: IMO, LULU, MADISON, MEM, TARA, CL.1, LISSÉ, VAIA, META, CYO

- automatic hygiene flush
- suitable for thermal disinfection
- adjustable follow-up time
- high-frequency sensors with self-calibration
- magnetic valve
- temperature setting via thermostat
- 100-240 V AC / 12 V DC, 50-60 Hz, 18 W power supply unit, incl. country-specific adapter set Cannot be combined with basins in conducting materials (e.g. steel. river stone). Cannot be combined with basins that have a closing drain.

Closing drain.

ATTENTION: Separate terms and conditions for electronic articles are applicable.

Cannot be combined with basins in conducting materials (e.g. steel. river stone).

Cannot be combined with basins that have a closing drain.

ATTENTION: Separate terms and conditions for electronic articles are applicable.

Required miscellaneous



eSET Touchfree Basin mixer with 35 740 970 90 temperature setting for combining with free-standing fittings -

Recommended miscellaneous

Extension for Touchfree 500 mm - 12 765 970 90

Required miscellaneous





eSET Touchfree Basin mixer with 35 741 970 90 temperature setting for combining with wall-mounted fittings -

- •max. recess depth 125 mm
- •min. recess depth 90 mm



ST 010 107 3080 mm [inches]





Certificates


LGA_29120. WRAS_1906116. IAPMO_EGS. CE000001_eSet_Tou CE000002_eSet_Tou

chfree_20171206_D chfree_20171206_E E_signed. N_signed.

LGA_29119.



ST 010 107 3980

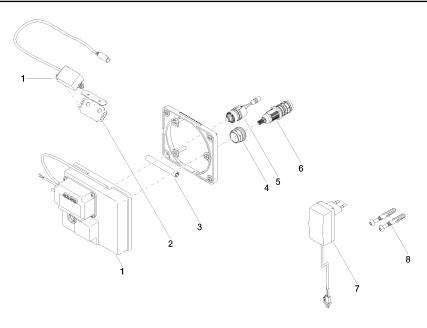

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 10 01 177 00 90	electronic accessories	1	2
2	90 17 20 199 00 90	holder	1	2
3	90 23 01 124 00 90	sleeve	1	2
4	09 23 10 129 90	nut	1	2
5	04 30 50 079 00 90	valve	1	2
6	90 15 02 013 00 90	cartridge	1	2
7	04 10 01 246 00 90	electronic accessories	1	2
8	04 30 31 024 01 90	fixing set	1	2







- 165mm projection
- fixed spout
- circular, air-enriched flow
- height of mixer 230 mm
- height up to aerator 205 mm
- hole diameter 35 mm
- rosette 60 x 60 mm
- 2x screw-in M 10 x 1 pressure hose, leak-tested
- 1/2" connection
- max. flow 7 l/min
- lead-free







Flow rate chart



Certificates

ETA_18519.

LGA_18651.



