

36 200 782 Produktversion ab 01.04.2022

- Drehumstellung
- Rosette 60 x 60 mm



| | | |
|---|---------------------------------|---------------|
|  | Dark Platinum gebürstet | 36 200 782-99 |
|  | Chrom | 36 200 782-00 |
|  | Platin gebürstet | 36 200 782-06 |
|  | Platin | 36 200 782-08 |
|  | Dark Chrome | 36 200 782-19 |
|  | Messing gebürstet (23kt Gold) | 36 200 782-28 |
|  | Champagne gebürstet (22kt Gold) | 36 200 782-46 |
|  | Champagne (22kt Gold) | 36 200 782-47 |


Benötigtes Zubehör



- UP-Zweiwege-Umstellung -** 35 202 970 90
- Min. Einbautiefe 115 mm
 - Max. Einbautiefe 160 mm

36 200 782 Produktversion ab 01.04.2022

mm [inches]



Durchflussdiagramm



Codes & Standards

DIN 4109

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



MEM UP-Zweiwege-Umstellung - Dark Platinum gebürstet


MEM

36 200 782 Produktversion ab 01.04.2022

Zertifikate und Nachhaltigkeit

LGA_38

WRAS_2307

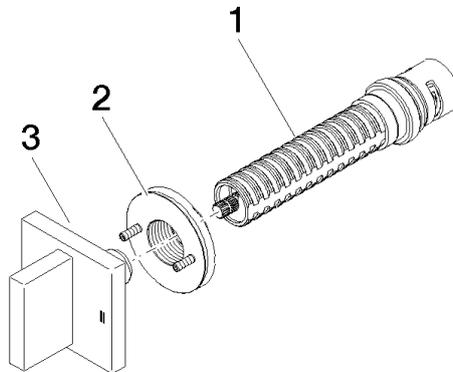

Ersatzteilstückliste

| Nr. | Artikelnummer | Benennung | Verbaumenge | Lieferzeit |
|-----|--------------------|------------|-------------|------------|
| 3 | 90 20 78 002 08-99 | Griff | 1,00 | 20 |
| 1 | 90 90 03 304 10 90 | Umstellung | 1,00 | 2 |
| 2 | 90 21 02 181 00 90 | Scheibe | 1,00 | 2 |