

36 120 660



- automatische Umstellung
- Abdeckplatte Ø 150 mm

Passt zu: TARA, META

	Light Gold	36 120 660-26
	Chrom	36 120 660-00
	Platin gebürstet	36 120 660-06
	Platin	36 120 660-08
	Dark Chrome	36 120 660-19
	Light Gold gebürstet	36 120 660-27
	Messing gebürstet (23kt Gold)	36 120 660-28
	Schwarz matt	36 120 660-33
	Bronze gebürstet	36 120 660-42
	Champagne gebürstet (22kt Gold)	36 120 660-46
	Champagne (22kt Gold)	36 120 660-47
	Chrom gebürstet	36 120 660-93
	Dark Platin gebürstet	36 120 660-99

Benötigtes Zubehör



UP-Einhandbatterie - 35 020 970 90
 •Min. Einbautiefe 80 mm
 •Max. Einbautiefe 105 mm

Benötigtes Zubehör



UP-Einhandbatterie mit Sicherungseinrichtung - 35 021 970 90
 •Min. Einbautiefe 80 mm
 •Max. Einbautiefe 105 mm

Empfohlenes Zubehör



xGRID Befestigungssatz für die Integration in den Trockenbau - 12 340 970 90


Benötigtes Zubehör




xGRID Montageschiene 555 mm - 12 360 970 90

36 120 660

mm [inches]

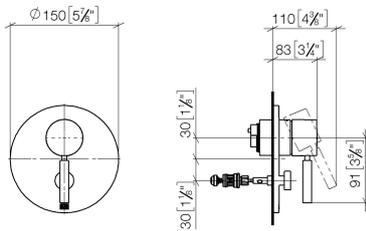

Durchflussdiagramm

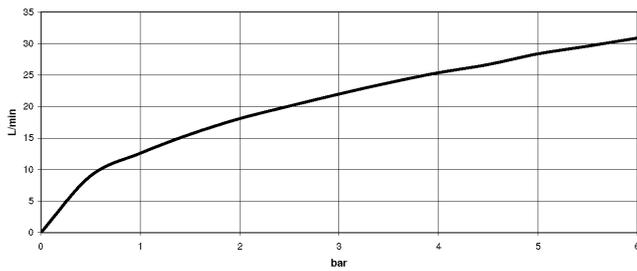

Zertifikate

LGA_19863.

WRAS_2207012.

36 120 660

