

36 120 670



- automatische Umstellung
- Abdeckplatte 150 x 90 mm

Passt zu: IMO, MEM, CL.1, CYO

	Champagne (22kt Gold)	36 120 670-47
	Chrom	36 120 670-00
	Platin gebürstet	36 120 670-06
	Platin	36 120 670-08
	Dark Chrome	36 120 670-19
	Light Gold gebürstet	36 120 670-27
	Messing gebürstet (23kt Gold)	36 120 670-28
	Schwarz matt	36 120 670-33
	Champagne gebürstet (22kt Gold)	36 120 670-46
	Chrom gebürstet	36 120 670-93
	Dark Platinum gebürstet	36 120 670-99

**Benötigtes Zubehör**



**UP-Einhandbatterie -** 35 020 970 90  
 •Max. Einbautiefe 105 mm  
 •Min. Einbautiefe 80 mm

**Benötigtes Zubehör**



**UP-Einhandbatterie mit Sicherungseinrichtung -** 35 021 970 90  
 •Max. Einbautiefe 105 mm  
 •Min. Einbautiefe 80 mm

**Empfohlenes Zubehör**



**xGRID Befestigungssatz für die Integration in den Trockenbau -** 12 340 970 90


**Benötigtes Zubehör**




**xGRID Montageschiene 555 mm -** 12 360 970 90

36 120 670

mm [inches]

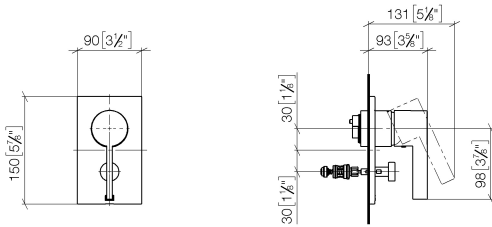

### Durchflussdiagramm

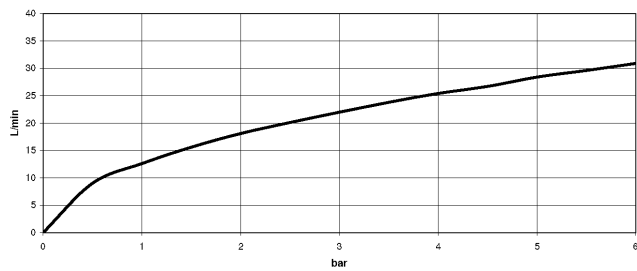

### Zertifikate

LGA\_19863.

WRAS\_2207012.

36 120 670

