

36 200 980 Produktversion ab 01.04.2022

- Drehumstellung
- Rosette 60 x 60 mm



	Chrom	36 200 980-00
	chrom gebürstet (04)	36 200 980-93
	Platin gebürstet	36 200 980-06
	Dark Chrome	36 200 980-19
	Light Gold gebürstet	36 200 980-27
	Messing gebürstet (23kt Gold)	36 200 980-28
	Schwarz matt	36 200 980-33
	Champagne gebürstet (22kt Gold)	36 200 980-46
	Champagne (22kt Gold)	36 200 980-47
	Dark Platinum gebürstet	36 200 980-99


**Benötigtes Zubehör**




- UP-Zweiwege-Umstellung -** 35 202 970 90
- Min. Einbautiefe 85 mm
  - Max. Einbautiefe 160 mm

36 200 980 Produktversion ab 01.04.2022

mm [inches]



**Durchflussdiagramm**

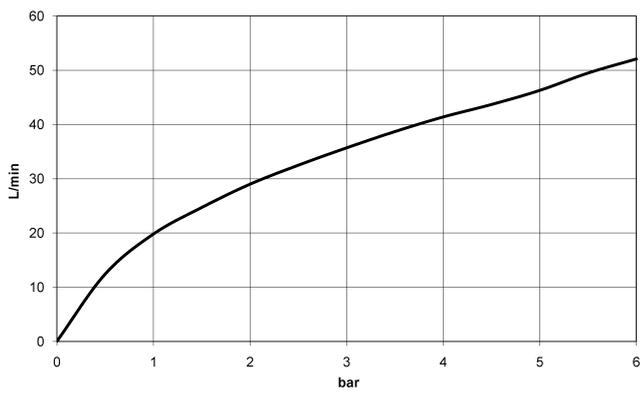

**Codes & Standards**

DIN 4109

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

**Ü-Zeichen**



## SYMETRICS UP-Zweiwege-Umstellung - Chrom


SYMETRICS

36 200 980 Produktversion ab 01.04.2022

### Zertifikate und Nachhaltigkeit

LGA\_38

WRAS\_2307

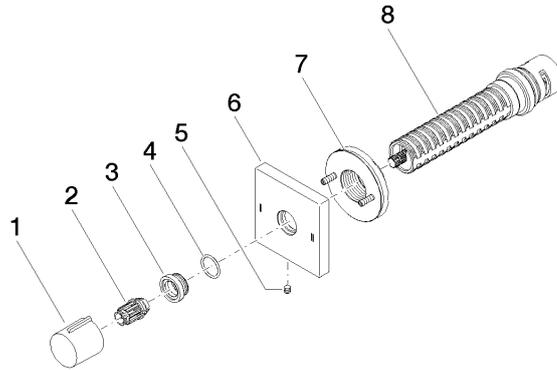

**Ersatzteilstückliste**

Nr.	Artikelnummer	Benennung	Verbaumenge	Lieferzeit
3	09 12 12 043-00	Aufnahme	1,00	10
7	90 21 02 181 00 90	Scheibe	1,00	2
8	90 90 03 304 10 90	Umstellung	1,00	2
4	09 14 10 017 90	Dichtung	1,00	2
5	09 31 11 294 90	Stift	1,00	2
2	09 12 12 005 90	Rastbuchse	1,00	2
6	09 27 98 037-00	Rosette	1,00	10
1	09 20 98 001-00	Griff	1,00	10