


Bath cascade spout for wall mounting - Matte Black

SERIES SPECIFIC


13 430 740    Product version from 9/1/2025



- 200mm projection
- cascade
- plate 180 mm x 60 mm
- hole diameter 40 mm
- 1/2" connection
- plug-link mounting
- max. flow 26.5 l/min at 3 bar flow pressure
- WRAS

	Matte Black	13 430 740-33
	Chrome	13 430 740-00
	Brushed Platinum	13 430 740-06
	Platinum	13 430 740-08
	Dark Chrome	13 430 740-19
	Brushed Durabrass (23kt Gold)	13 430 740-28
	Brushed Champagne (22kt Gold)	13 430 740-46
	Champagne (22kt Gold)	13 430 740-47
	Brushed Dark Platinum	13 430 740-99

Recommended miscellaneous



Concealed wall elbow -

35 085 970 90

- max. recess depth 163 mm
- min. recess depth 90 mm

13 430 740 Product version from 9/1/2025


mm [inches]



Flow rate chart



Trajectory diagram

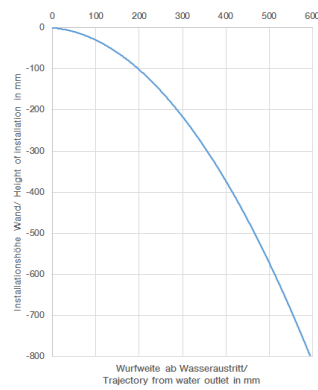

## Codes & Standards

ASME A112.18.1 cUPC DIN 4109 ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

Ü-Zeichen



Bath cascade spout for wall mounting - Matte Black

SERIES SPECIFIC

13 430 740    Product version from 9/1/2025

Certificates and sustainability

IAPMO_4976	LGA_19	WRAS_240502
------------	--------	-------------



Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
	2 09 17 97 056 90	holder	1.00	2
	6 90 29 03 059 00 90	insert	1.00	2
	1 04 30 31 014 00 90	fixing set	1.00	2
	3 90 24 05 008 00 90	nipple set	1.00	2
	5 09 11 74 042-33	spout	1.00	60
	4 09 31 11 144 90	pin	2.00	2