


## Rain shower for recessed ceiling installation with light 300 x 240 mm - Champagne (22kt Gold)

IMO

28 044 980



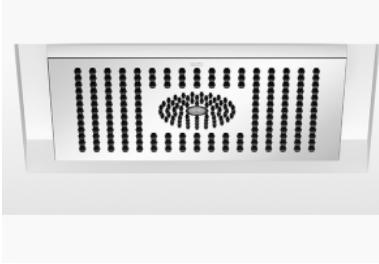









Fits: IMO, LULU, MEM, CL.1, CYO

- rain shower 300 x 240mm
- PURE RAIN, max. flow rate 12 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- min. recess depth 137 mm
- with anti-scale system
- central RGBW LED spot
- RGBW LED ambient lighting
- For simultaneous control of the jet types, we recommend the xTool thermostat module
- Provided by customer: Zigbee gateway
- Not suitable for use in a steam room.

**includes light bulbs with a Class G energy efficiency**

includes light bulbs with a Class G energy efficiency

	Champagne (22kt Gold)	28 044 980-47
	Chrome	28 044 980-00
	Brushed Platinum	28 044 980-06
	Platinum	28 044 980-08
	Dark Chrome	28 044 980-19
	Brushed Durabronze (23kt Gold)	28 044 980-28
	Matte Black	28 044 980-33
	Brushed Champagne (22kt Gold)	28 044 980-46
	Brushed Chrome	28 044 980-93
	Brushed Dark Platinum	28 044 980-99

### Required miscellaneous



#### **Concealed ceiling installation box for recessed ceiling installation with light -**

35 044 970 90


- concealed rough parts
- flush-mounted installation box 360x300 mm RAL 9003 signal white
- recess depth 137mm
- Supply pipe 7 m
- Input 100-240V AC 50-60Hz
- Output 12V DC SELV / Class II
- ZigBee Light Link RGBW controller
- Provided by customer: Zigbee gateway

## Rain shower for recessed ceiling installation with light 300 x 240 mm - Champagne (22kt Gold)


IMO

28 044 980

mm [inches]

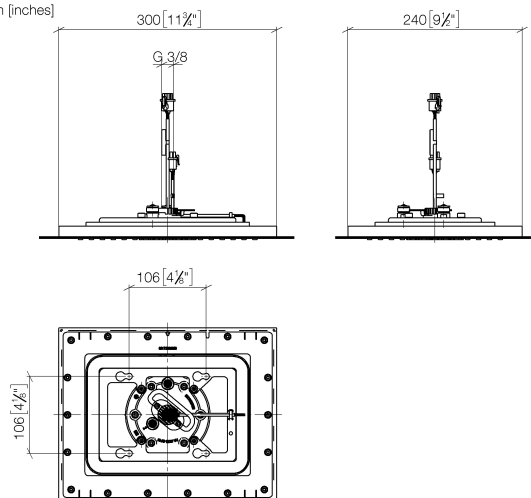

### Flow rate chart

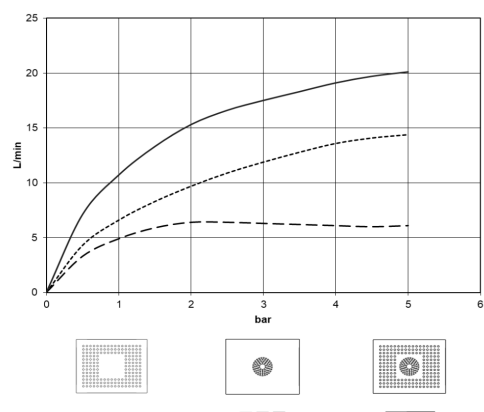


### Certificates

LGA\_38403.

## Rain shower for recessed ceiling installation with light 300 x 240 mm - Champagne (22kt Gold)

IMO

28 044 980

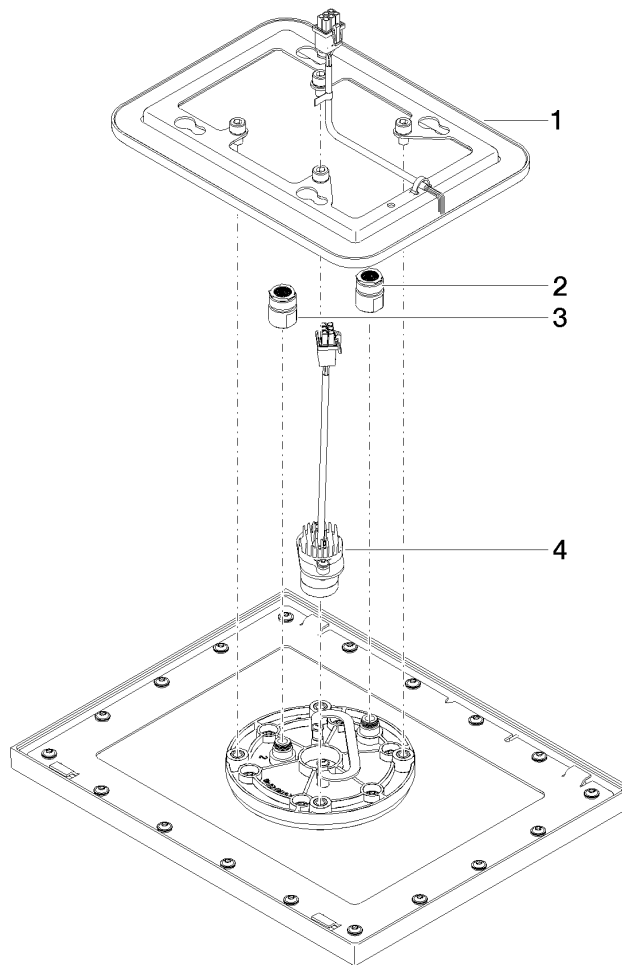

### Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 10 01 224 00 90	electronic accessories	1	2
2	90 24 03 309 01 90	connection	1	2
3	90 24 03 309 00 90	connection	1	2
4	90 10 01 225 00 90	electronic accessories	1	2