




33 950 210



- 204mm projection
  - pivotable spout 360°
  - air-enriched flow
  - max. flow 8 l/min at 3 bar flow pressure
  - fabric braided hose 1500 mm
- Intrinsic protection against back flow.

	Brushed Nickel	33 950 210-70
	Chrome	33 950 210-00
	Soft Black	33 950 210-69

33 950 210



### Flow rate chart



## Codes & Standards

DIN 4109

EN 1717

EN 817

ISO 3822

## Ü-Zeichen

XP P 41-280



DORNBRACHT PIUR Single-lever mixer Pull-out - Brushed Nickel

DORNBRACHT  
PIUR


33 950 210

Certificates and sustainability

Belgaqua_23-012-2	ACS_23 ACC NY	AbP_10	DVGW_DW-6506DO0
-------------------	---------------	--------	-----------------

33 950 210

Parts for other  
finishes can be found  
here: [Chrome](#)

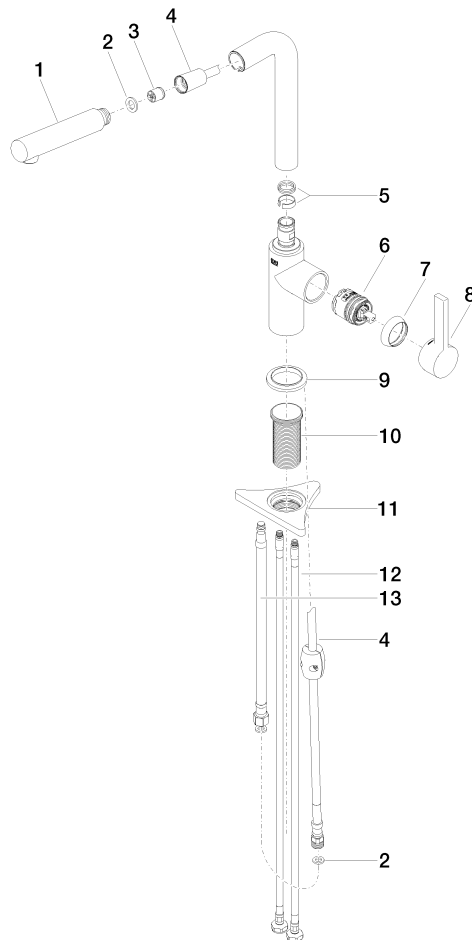

## Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
	2 90 14 05 081 00 90	seal	1.00	2
	5 90 14 15 060 00 90	gasket kit	1.00	2
	7 90 28 30 011 00-70	cover	1.00	2
	6 90 15 05 060 00 90	cartridge	1.00	2
	8 90 20 21 001 00-70	handle	1.00	2
	10 90 30 01 200 00 90	shaft	1.00	2
	3 90 23 01 051 00 90	flow reducer	1.00	2
	13 90 30 04 110 00 90	hose	1.00	2
	11 90 23 10 003 00 90	fixing set	1.00	2
	4 90 30 02 101 00 90	hose	1.00	2
	9 90 27 21 001 00-70	rosette	1.00	2
	12 04 30 04 101 00 90	hose	2.00	2
	1 90 12 11 180 00-70	shower	1.00	2