









SERENITY SKY Rain panel for recessed ceiling installation - Brushed Champagne (22kt Gold)

41 770 979



- exposed trim parts
- Rain panel with 2 different spray modes
- PURIFY RAIN, 175 x 175 mm, max. flow rate 10 l/min (at 3 bar)
- FULL RAIN, 455 x 315 mm, max. flow rate 14 l/min (at 3 bar)
- Rain panel, 600 x 420 mm
- min. recess depth 150 mm
- weight 15kg
- feed pipe (hot/cold): 2x DN 20
- with anti-scale system
- Recommended control element: xTool
- Not suitable for use in a steam room.

| | | |
|--|-------------------------------|---------------|
|  | Brushed Champagne (22kt Gold) | 41 770 979-46 |
|  | Chrome | 41 770 979-00 |
|  | Dark Chrome | 41 770 979-19 |
|  | Brushed Bronze | 41 770 979-42 |
|  | Champagne (22kt Gold) | 41 770 979-47 |
|  | Brushed Stainless Steel | 41 770 979-86 |
|  | Brushed Dark Platinum | 41 770 979-99 |

Required miscellaneous




SERENITY SKY Concealed ceiling installation box - 35 770 970 90


- concealed rough parts
- 2x female thread 1/2" connections
- flush-mounted reflection box, 662 x 482 mm, RAL 9003, Signal White
- min. recess depth 150 mm
- weight 15kg
- Recommended control element: xTool

**SERENITY SKY Rain panel for recessed ceiling installation - Brushed
Champagne (22kt Gold)**

41 770 979
mm [inches]
1:10

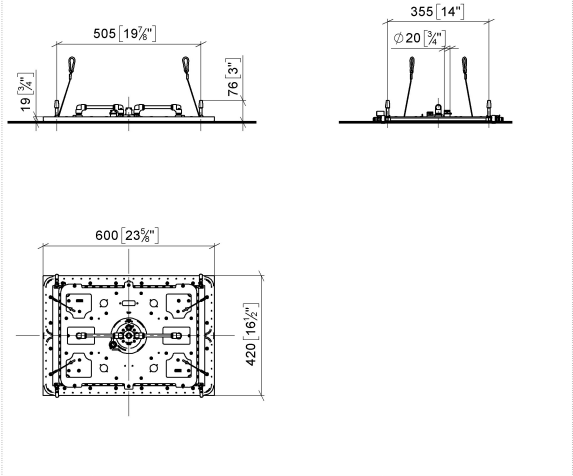

Flow rate chart

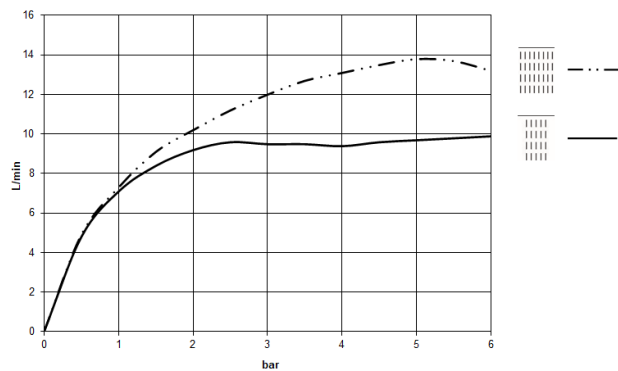



SERENITY SKY Rain panel for recessed ceiling installation - Brushed Champagne (22kt Gold)

41 770 979



SERENITY SKY Rain panel for recessed ceiling installation - Brushed Champagne (22kt Gold)

41 770 979

Spare parts list