

27 808 809



- COMPACT RAIN, max. flow rate 6.8 l/min (at 3 bar)
- with anti-scale system
- 3/8" shower outlet
- rosette for wall elbow Ø 60mm
- rosette for shower holder Ø 60mm
- metal shower hose 1250mm with integrated anti-twist protection
- 1/2" wall elbow
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

Intrinsic protection against back flow.

	Platinum	27 808 809-08 0010
	Chrome	27 808 809-00
	Chrome	27 808 809-00 0010
	Brushed Platinum	27 808 809-06
	Brushed Platinum	27 808 809-06 0010
	Platinum	27 808 809-08
	Dark Chrome	27 808 809-19 0010
	Brushed Durabronze (23kt Gold)	27 808 809-28 0010
	Brushed Durabronze (23kt Gold)	27 808 809-28
	Brushed Bronze	27 808 809-42
	Brushed Bronze	27 808 809-42 0010
	Brushed Champagne (22kt Gold)	27 808 809-46 0010
	Champagne (22kt Gold)	27 808 809-47 0010
	Brushed Dark Platinum	27 808 809-99
	Brushed Dark Platinum	27 808 809-99 0010


Recommended miscellaneous

- Concealed wall elbow -** 35 085 970 90
- max. recess depth 163 mm
  - min. recess depth 90 mm




27 808 809

mm [inches]

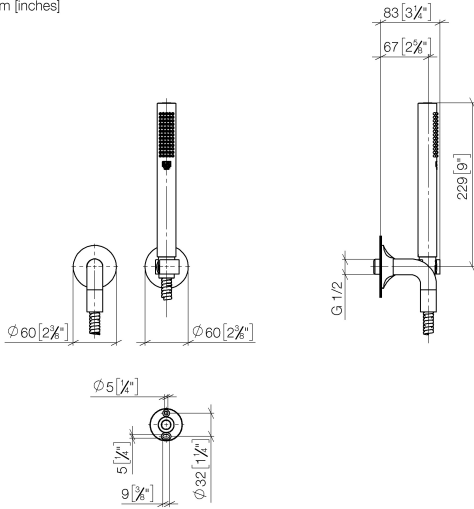

Flow rate chart

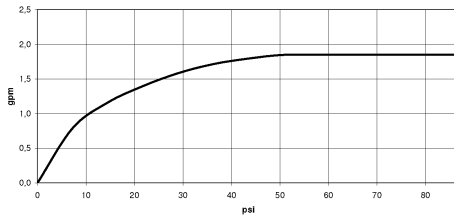

Codes & Standards

ASME A112.18.1

cUPC

DIN 4109

ISO 3822

Ü-Zeichen



## VAIA Hand shower set with individual rosettes FlowReduce - Platinum

---

VAIA


27 808 809

### Certificates

---

IAPMO\_4976

LGA\_29

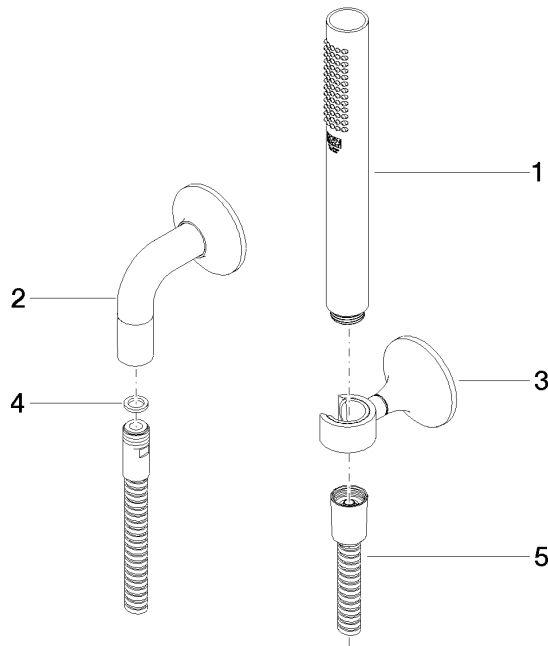



# VAIA Hand shower set with individual rosettes FlowReduce - Platinum

VAIA

27 808 809

## Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
	90 12 11 140 30-08	shower	5	40