

















Rain shower for surface-mounted ceiling installation 300 mm - Brushed Platinum
SERIES SPECIFIC

28 031 970	Product version from 5/1/2022		
	<ul style="list-style-type: none"> rain shower Ø 300 mm PURE RAIN, max. flow rate 12 l/min (at 3 bar) PURIFY RAIN, max. flow rate 6 l/min (at 3 bar) with anti-scale system 		Brushed Platinum 28 031 970-06
	Technical data: <ul style="list-style-type: none"> Distance to ceiling from bottom edge of shower 40 mm For simultaneous control of the jet types, we recommend the xTool thermostat module WRAS 		Chrome 28 031 970-00
			Platinum 28 031 970-08
			Dark Chrome 28 031 970-19
			Light Gold 28 031 970-26
			Brushed Light Gold 28 031 970-27
			Brushed Durabrass (23kt Gold) 28 031 970-28
			Matte Black 28 031 970-33
			Brushed Dark Brass 28 031 970-39
			Brushed Bronze 28 031 970-42
			Brushed Champagne (22kt Gold) 28 031 970-46
			Champagne (22kt Gold) 28 031 970-47
			Brushed Chrome 28 031 970-93
			Brushed Dark Platinum 28 031 970-99

Required miscellaneous

	Concealed ceiling installation box with ceiling fixing - 35 041 970 90 <ul style="list-style-type: none"> min. recess depth 90 mm max. recess depth 115 mm 2x female thread 1/2" outlet concealed rough parts
---	--

Rain shower for surface-mounted ceiling installation 300 mm - Brushed Platinum

SERIES SPECIFIC

28 031 970 Product version from 5/1/2022
mm [inches]



Flow rate chart



Codes & Standards

DIN 4109

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



Rain shower for surface-mounted ceiling installation 300 mm - Brushed
Platinum


SERIES SPECIFIC

28 031 970 Product version from 5/1/2022

Certificates and sustainability

LGA_38

WRAS_240502

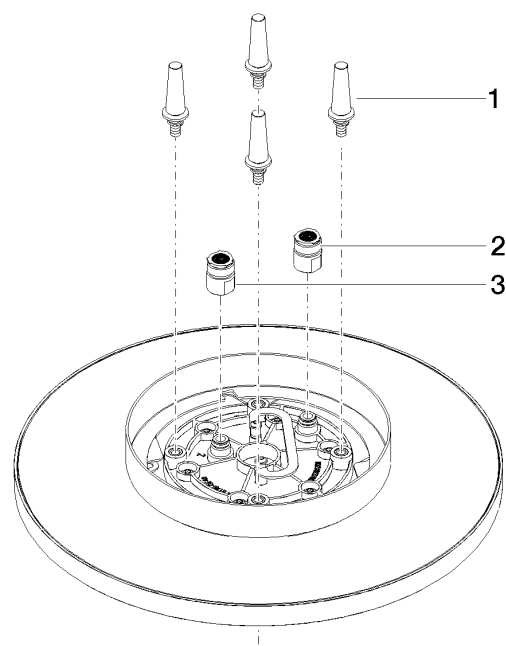

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 17 20 263 00 90	fixing set	1.00	2
2	90 24 03 309 01 90	connection	1.00	2
3	90 24 03 309 00 90	connection	1.00	2