

**TARA** 

28 032 970



Fits: TARA, LISSÉ, VAIA, META

- rain shower Ø 300 mm
- PURE RAIN, max. flow rate 12 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- Distance to ceiling from bottom edge of shower 40
- with anti-scale system
- central LED Spot 3000 K
- Provided by customer: Light switch
- For simultaneous control of the jet types, we recommend the xTool thermostat module

  Not suitable for use in a steam room.
- WRAS 240502006

includes light bulbs with a Class F energy efficiency

includes light bulbs with a Class F energy efficiency

	Brushed Light Gold	28 032 970-27
)	Chrome	28 032 970-00
	Brushed Platinum	28 032 970-06
	Platinum	28 032 970-08
	Dark Chrome	28 032 970-19
	Light Gold	28 032 970-26
	Brushed Durabrass (23kt Gold)	28 032 970-28
	Matte Black	28 032 970-33
	Brushed Bronze	28 032 970-42
	Brushed Champagne (22kt Gold)	28 032 970-46
	Champagne (22kt Gold)	28 032 970-47
	Brushed Chrome	28 032 970-93
	Brushed Dark Platinum	28 032 970-99

#### Required miscellaneous




Concealed ceiling installation box 35 042 970 90 for surface-mounted ceiling installation with light -


- concealed rough parts
- •min. recess depth 90 mm
- •max. recess depth 115 mm
- •2x female thread 1/2" connections
- •Input 100-240V AC 50-60Hz
- •Output 350 mA SELV / Class II
- •Provided by customer: Light switch







#### Flow rate chart



### Codes & Standards

DIN 4109 ISO 3822 Scottish Water UK Water Supply Byelaws Regulations

Ü-Zeichen



TARA

28 032 970 Certificates

LGA\_38


WRAS\_240502





28 032 970

### **Product version from 5/1/2022**

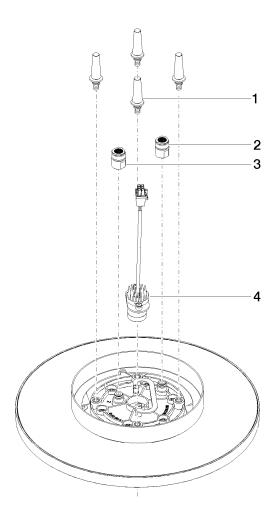

7/16/2024



TARA

28 032 970

### **Spare parts list**

### **Product version from 5/1/2022**

No.	Item Number	Name	Quantity used	Delivery time
	90 17 20 263 00 90	fixing set	4	2