


Rain shower for surface-mounted ceiling installation with light 300 mm -Brushed Durabrass (23kt Gold)

TARA


28 032 970			
	 rain shower Ø 300 mm PURE RAIN, max. flow rate 12 l/min (at 3 bar) PURIFY RAIN, max. flow rate 6 l/min (at 3 bar) Distance to ceiling from bottom edge of shower 40 mm with anti-scale system central LED Spot 3000 K Provided by customer: Light switch For simultaneous control of the jet types, we recommend the xTool thermostat module Not suitable for use in a steam room. 	Brushed Durabrass (23kt Gold)	28 032 970-28
		Chrome	28 032 970-00
		Brushed Platinum	28 032 970-06
		Platinum	28 032 970-08
Fits: TARA, LISSÉ, VAIA, META	 WRAS 240502006 includes light bulbs with a Class F energy efficiency 	Dark Chrome	28 032 970-19
	includes light bulbs with a Class F energy efficiency	Light Gold	28 032 970-26
		Brushed Light Gold	28 032 970-27
		Matte Black	28 032 970-33
		Brushed Bronze	28 032 970-42
		Brushed Champagne (22kt Gold)	28 032 970-46
		Champagne (22kt Gold)	28 032 970-47
		Brushed Chrome	28 032 970-93
		Brushed Dark Platinum	28 032 970-99

Required miscellaneous






Rain shower for surface-mounted ceiling installation with light 300 mm -Brushed Durabrass (23kt Gold)



Flow rate chart



Codes & Standards

DIN 4109

Scottish Water Byelaws UK Water Supply Regulations

Ü-Zeichen

ISO 3822



28 032 970 Certificates

LGA_38 WRAS_240502

TARA


3/5 7/16/2024



Rain shower for surface-mounted ceiling installation with light 300 mm -Brushed Durabrass (23kt Gold)

28 032 970

Product version from 5/1/2022

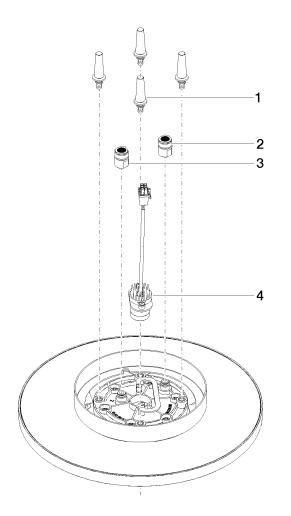



28 032 970

Spare parts list

Product version from 5/1/2022

No.	Item Number	Name	Quantity used	Delivery time
	90 17 20 263 00 90	fixing set	4	2