

Rain shower for surface-mounted ceiling installation with light 300 mm - Brushed Champagne (22kt Gold)

SERIES SPECIFIC

28 032 970 Product version from 5/1/2022



- rain shower Ø 300 mm
- PURE RAIN, max. flow rate 12 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- with anti-scale system

Technical data:

- Distance to ceiling from bottom edge of shower 40 mm

Ceiling module power supply

- 350mA (CC)

Spot lighting

- LED colour temperature approx. 3000 K
- Bulbs protected against splashing water

Electric:

- Technology: LED, not dimmable
- Provided by customer: Light switch
- Contains energy efficiency class bulbs

Planning tips:

- Not suitable for outdoor use.
- Not suitable for use in a steam room.
- Not suitable for use in chlorinated or salty environments.
- Comply with the protection zone regulations as defined in DIN VDE 0100, Part 701 (IEC 60364-7-701).
- WRAS

| | | |
|--|--------------------------------|---------------|
| | Brushed Champagne (22kt Gold) | 28 032 970-46 |
| | Chrome | 28 032 970-00 |
| | Brushed Platinum | 28 032 970-06 |
| | Platinum | 28 032 970-08 |
| | Dark Chrome | 28 032 970-19 |
| | Light Gold | 28 032 970-26 |
| | Brushed Light Gold | 28 032 970-27 |
| | Brushed Durabronze (23kt Gold) | 28 032 970-28 |
| | Matte Black | 28 032 970-33 |
| | Brushed Dark Brass | 28 032 970-39 |
| | Brushed Bronze | 28 032 970-42 |
| | Champagne (22kt Gold) | 28 032 970-47 |
| | Brushed Chrome | 28 032 970-93 |
| | Brushed Dark Platinum | 28 032 970-99 |

Required miscellaneous




Concealed ceiling installation box 35 042 970 90 for surface-mounted ceiling installation with light -

- concealed rough parts
- min. recess depth 90 mm
- max. recess depth 115 mm
- 2x female thread 1/2" connections
- Input 100-240V AC 50-60Hz
- Output 350 mA SELV / Class 2
- Provided by customer: Light switch


Rain shower for surface-mounted ceiling installation with light 300 mm - Brushed Champagne (22kt Gold)

SERIES SPECIFIC

28 032 970 Product version from 5/1/2022
mm [inches]

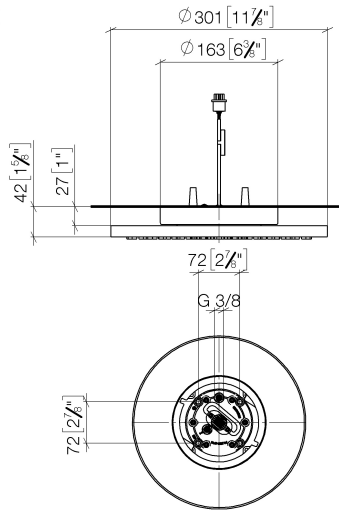

Flow rate chart

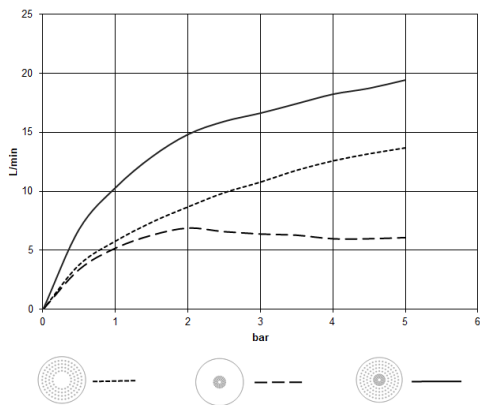

Codes & Standards

DIN 4109

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



Rain shower for surface-mounted ceiling installation with light 300 mm - Brushed Champagne (22kt Gold)

SERIES SPECIFIC

28 032 970 Product version from 5/1/2022

Certificates and sustainability


LGA_38

WRAS_240502

Rain shower for surface-mounted ceiling installation with light 300 mm - Brushed Champagne (22kt Gold)

SERIES SPECIFIC

28 032 970 Product version from 5/1/2022

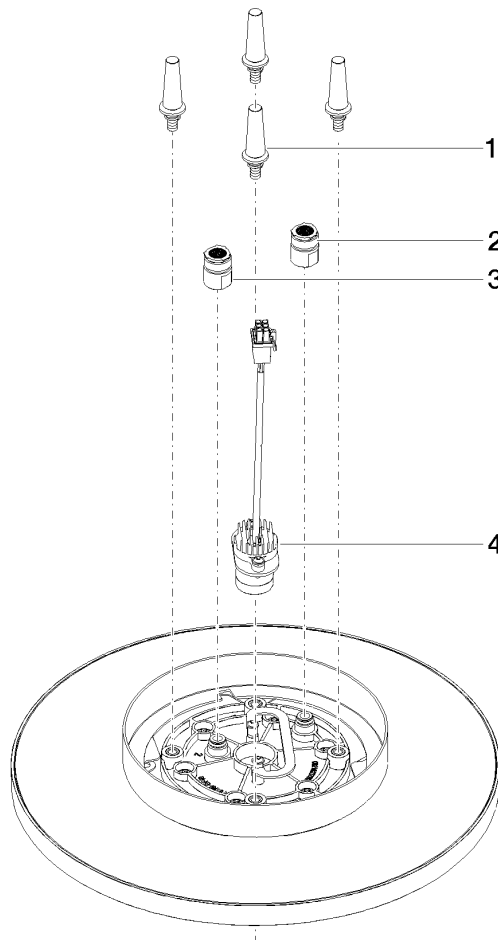

Spare parts list

| No. | Item Number | Name | Quantity used | Delivery time |
|-----|--------------------|------------------------|---------------|---------------|
| 1 | 90 17 20 263 00 90 | fixing set | 1.00 | 2 |
| 4 | 90 10 01 225 00 90 | electronic accessories | 1.00 | 2 |
| 3 | 90 24 03 309 00 90 | connection | 1.00 | 2 |
| 2 | 90 24 03 309 01 90 | connection | 1.00 | 2 |