

Body spray without volume control FlowReduce - Dark Chrome

TARA

28 518 979



- spray head Ø 55mm
- ball-joint pivotable through 25° (in any direction)
- HORIZONTAL RAIN, max. flow rate 5 l/min (at 3 bar)
- with anti-scale system
- rosette Ø 55 mm
- 1/2" connection
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

Fits: TARA, LISSÉ, VAIA, META

| | | |
|--|--------------------------------|---------------|
|  | Dark Chrome | 28 518 979-19 |
|  | Chrome | 28 518 979-00 |
|  | Brushed Platinum | 28 518 979-06 |
|  | Platinum | 28 518 979-08 |
|  | Durabronze (23kt Gold) | 28 518 979-09 |
|  | Light Gold | 28 518 979-26 |
|  | Brushed Light Gold | 28 518 979-27 |
|  | Brushed Durabronze (23kt Gold) | 28 518 979-28 |
|  | Matte Black | 28 518 979-33 |
|  | Brushed Bronze | 28 518 979-42 |
|  | Brushed Champagne (22kt Gold) | 28 518 979-46 |
|  | Champagne (22kt Gold) | 28 518 979-47 |
|  | Brushed Chrome | 28 518 979-93 |
|  | Brushed Dark Platinum | 28 518 979-99 |


Recommended miscellaneous




- Concealed wall elbow -** 35 085 970 90
- max. recess depth 163 mm
 - min. recess depth 90 mm

28 518 979


mm [inches]



Flow rate chart

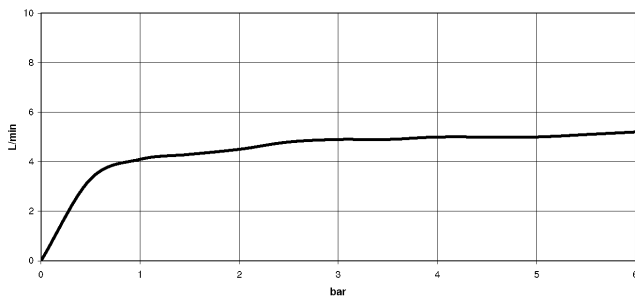

Trajectory diagram

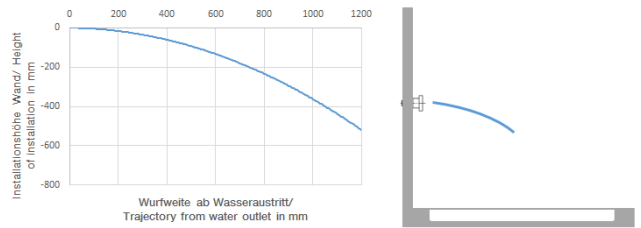

Codes & Standards

DIN 4109

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



Body spray without volume control FlowReduce - Dark Chrome


TARA

28 518 979

Certificates

LGA_38

WRAS_240602

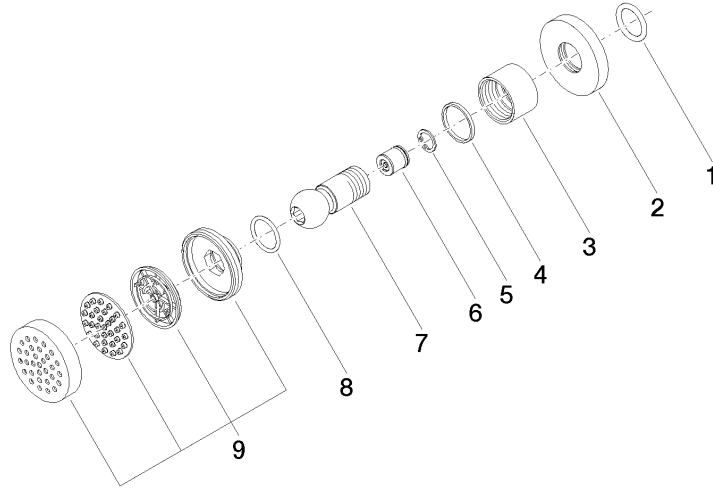



Spare parts list