

TARA ULTRA

33 860 875



- 240mm projection
- pivotable 360°
- air-enriched flow and spray flow
- height of mixer 685 mm
- height up to aerator 129 mm
- hole diameter 35 mm
- sprayface with anti-scaling system
- max. flow 8 l/min at 3 bar flow pressure
- lead-free
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

Intrinsic protection against back flow.

Brushed Platinum	33 860 875-06
Chrome	33 860 875-00
Platinum	33 860 875-08
Dark Chrome	33 860 875-19
Brushed Chrome	33 860 875-93
Brushed Dark Platinum	33 860 875-99

Recommended miscellaneous

Strainer waste with control handle 10 712 970-06


- Brushed Platinum

Recommended miscellaneous

Dispenser without rosette - Brushed Platinum 82 424 970-06




33 860 875







Flow rate chart



Codes & Standards

DIN 4109 EN 1717 ISO 3822 Ü-Zeichen



TARA ULTRA

33 860 875

Certificates

Belgaqua_22_277_2 LGA_18




33 860 875

Product version up to 7/24/2018 Product version from 7/24/2018 to 5/15/2020 Product version from 5/15/2020 to 5/16/2020 Product version from 5/15/2020 to 5/3/2021 Product version from 5/3/2021

Product version from 6/1/2022

Parts for other finishes can be found here: Chrome

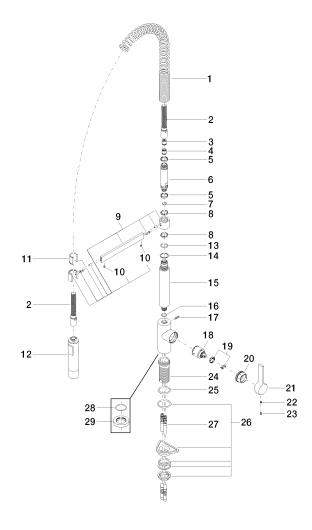

7/16/2024





33 860 875

Spare parts list

Product version up to 7/24/2018

Product version from 7/24/2018 to 5/15/2020

Product version from 5/15/2020 to 5/16/2020

Product version from 5/15/2020 to 5/3/2021

Product version from 5/3/2021

Product version from 6/1/2022

No.	Item Number	Name	Quantity used	Delivery time
	09 16 02 035 90	spring	33	2