



## Concealed wall mounting -

---

35 003 970 90



- red brass, lead-free
- 2x female thread 1/2" connections
- dust cover
- anti-water packing
- soundproofing
- WRAS 2101023, 2003025

Can only be combined with exposed trim parts 26  
024 661-FF / 36 013 660-FF / 36 045 660-FF / 36  
013 970-FF / 36 045 970-FF / 36 804 661-FF.

## Recommended miscellaneous

---



### **Extension 25 mm -**


12 179 970 90

- Can only be combined with  
exposed trim parts 36 804 661-FF.


**Concealed wall mounting -**

35 003 970 90

mm [inches]

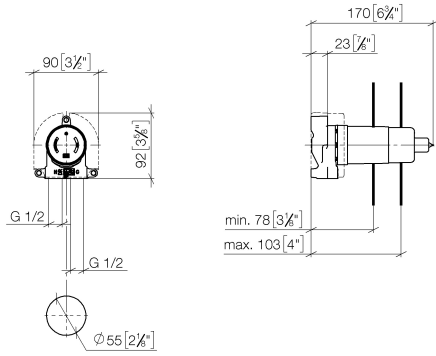

**Flow rate chart**

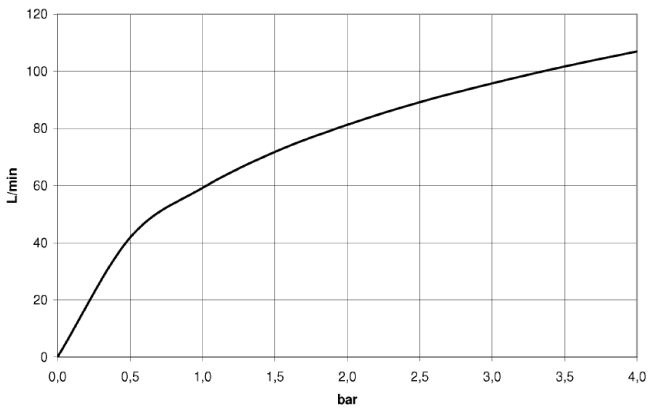

**Codes & Standards**

DIN 4109

EN 817

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

Ü-Zeichen



## Concealed wall mounting -

---

35 003 970 90

### Certificates

---

WRAS\_2101

DVGW\_DW-  
6512DN0

WRAS\_2003

LGA\_18




## Concealed wall mounting -

---

35 003 970 90

Product version up to 10/2/2019

**Product version from 10/2/2019**

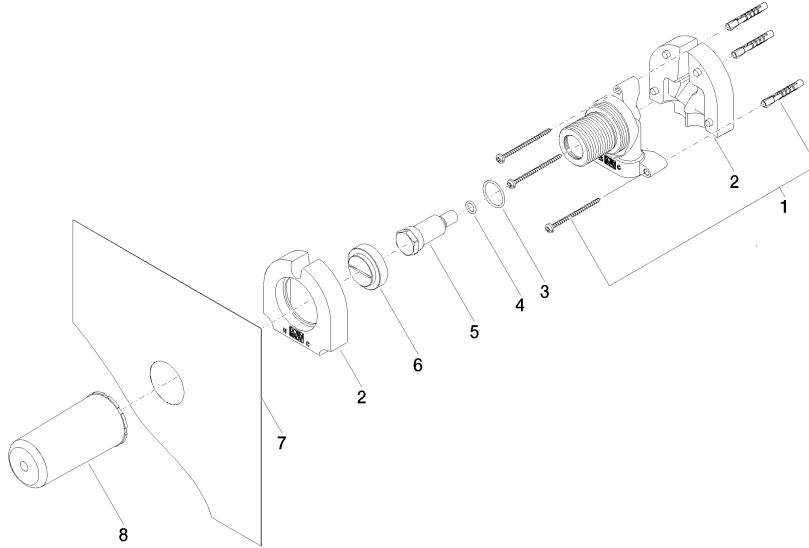



## Concealed wall mounting -

---

35 003 970 90

### Spare parts list

Product version up to 10/2/2019

### Product version from 10/2/2019

| No. | Item Number        | Name       | Quantity used | Delivery time |
|-----|--------------------|------------|---------------|---------------|
|     | 05 30 31 029 00 90 | fixing set | 9             | 2             |