

xTOOL Concealed thermostat without volume control 1/2" - Brushed Champagne (22kt Gold)

SERIES SPECIFIC

36 501 985 Product version from 1/1/2022



- cover plate 120 x 120 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge
- WRAS

	Brushed Champagne (22kt Gold)	36 501 985-46
	Chrome	36 501 985-00
	Brushed Platinum	36 501 985-06
	Platinum	36 501 985-08
	Dark Chrome	36 501 985-19
	Brushed Light Gold	36 501 985-27
	Brushed Durabronze (23kt Gold)	36 501 985-28
	Matte Black	36 501 985-33
	Champagne (22kt Gold)	36 501 985-47
	Brushed Chrome	36 501 985-93
	Brushed Dark Platinum	36 501 985-99

Required miscellaneous



xTOOL Concealed thermostat module without volume control - 35 503 970 90

- min. recess depth 95 mm
- max. recess depth 160 mm

Required miscellaneous



xGRID Installation track 555 mm - 12 360 970 90

Recommended miscellaneous




xGRID Attachment set for integrating in the dry wall construction - 12 340 970 90

xTOOL Concealed thermostat without volume control 1/2" - Brushed Champagne (22kt Gold)

SERIES SPECIFIC

36 501 985 Product version from 1/1/2022
mm [inches]

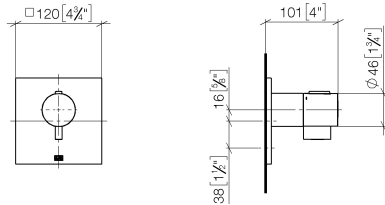

Flow rate chart



Codes & Standards

DIN 4109

EN 1111

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



xTOOL Concealed thermostat without volume control 1/2" - Brushed
Champagne (22kt Gold)

SERIES SPECIFIC

36 501 985 Product version from 1/1/2022

Certificates and sustainability

WRAS_2011	DVGW_DW- 6512DN0	LGA_29
-----------	---------------------	--------

**xTOOL Concealed thermostat without volume control 1/2" - Brushed
Champagne (22kt Gold)**

SERIES SPECIFIC

36 501 985 Product version from 1/1/2022

