

# SERENITY SKY Rain panel for recessed ceiling installation with light FlowReduce - Brushed Champagne (22kt Gold)

SERIES-VARIOUS

41 773 979 Product version from 9/1/2024



- exposed trim parts
- Rain panel with 2 different spray modes
- PURIFY RAIN, 175 x 175 mm, max. flow rate 6.8 l/min (at 3 bar)
- FULL RAIN, 455 x 315 mm, max. flow rate 6.8 l/min (at 3 bar)
- Rain panel, 600 x 420 mm
- min. recess depth 150 mm
- weight 15kg
- feed pipe (hot/cold): 2x DN 20
- with anti-scale system
- Recommended control element: xTool

## Ceiling module power supply

- 24V DC (CV)

## Ambient lighting

- LED coloured light RGBW
- Bulbs protected against splashing water

## Activation

- ZigBee Light Link RGBW controller
- Provided by customer: Zigbee gateway

## Environment

- Not suitable for outdoor use.
- Not suitable for use in a steam room.
- Not suitable for use in chlorinated or salty environments.
- Comply with the protection zone regulations as defined in DIN VDE 0100, Part 701 (IEC 60364-7-701).
- Dornbracht recommends consulting a systems integrator.
- includes light bulbs with a Class G energy efficiency**

includes light bulbs with a Class G energy efficiency

	Brushed Champagne (22kt Gold)	41 773 979-46
	Chrome	41 773 979-00
	Dark Chrome	41 773 979-19
	Brushed Bronze	41 773 979-42
	Champagne (22kt Gold)	41 773 979-47
	Brushed Stainless Steel	41 773 979-86
	Brushed Dark Platinum	41 773 979-99

## Required miscellaneous




### SERENITY SKY Concealed ceiling installation box with light - 35 771 970 90

- concealed rough parts
- flush-mounted reflection box, 662 x 482 mm, RAL 9003, Signal White
- 2x female thread 1/2" connections
- min. recess depth 150 mm
- weight 15kg
- Supply pipe 7 m
- Input 100-240V AC 50-60Hz
- Output 24V DC SELV / Class 2
- ZigBee Light Link RGBW controller
- Provided by customer: Zigbee gateway


SERENITY SKY Rain panel for recessed ceiling installation with light
FlowReduce - Brushed Champagne (22kt Gold)

SERIES-VARIOUS

41 773 979    Product version from 9/1/2024  
mm [inches]  
1:10

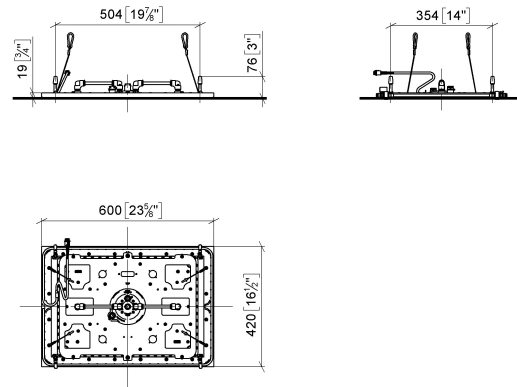

### Flow rate chart

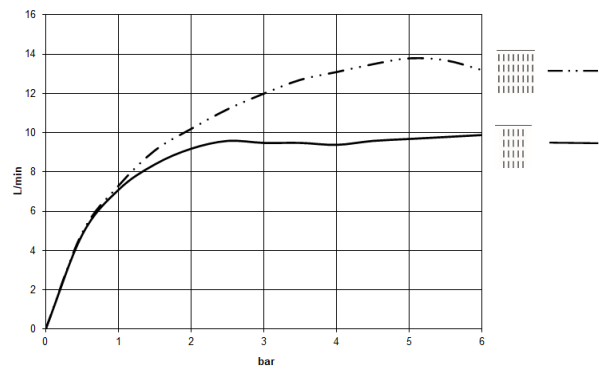

### Codes & Standards

DIN 4109	ISO 3822	Scottish Water Byelaws	UK Water Supply Regulations
----------	----------	------------------------	-----------------------------

### Ü-Zeichen



SERENITY SKY Rain panel for recessed ceiling installation with light  
FlowReduce - Brushed Champagne (22kt Gold)

SERIES-VARIOUS

41 773 979    Product version from 9/1/2024

Certificates and sustainability

LGA\_38

WRAS\_250102



### Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
2	91 16 02 053 00 90	holder	2.00	2
1	90 12 01 095 03 90	shower	1.00	2
4	90 12 05 106 00-46	cover	1.00	30
3	90 10 01 263 00 90	electronic accessories	1.00	2
5	90 30 04 033 01 90	hose	1.00	2