

ST 010 107 3980



- 165mm projection
- fixed spout
- circular, air-enriched flow
- height of mixer 230 mm
- height up to aerator 205 mm
- hole diameter 35 mm
- 2x screw-in M 10 x 1 pressure hose, leak-tested
- 1/2" connection
- max. flow 7 l/min
- lead-free
- automatic hygiene flush
- suitable for thermal disinfection
- adjustable follow-up time
- high-frequency sensors with self-calibration
- magnetic valve
- temperature setting via thermostat
- 100-240 V AC / 12 V DC, 50-60 Hz, 18 W power supply unit, incl. country-specific adapter set Cannot be combined with basins in conducting materials (e.g. steel. river stone). Cannot be combined with basins that have a closing drain.

  ATTENTION: Separate terms and conditions for electronic articles are applicable.

### Individual components of this set

You need the following components for this set



1x 42 765 970 90



x 13 721 980-00





ST 010 107 3980



Fits: IMO, LULU, MADISON, MEM, TARA, CL.1, LISSÉ, VAIA, META, CYO

- automatic hygiene flush
- suitable for thermal disinfection
- adjustable follow-up time
- high-frequency sensors with self-calibration
- magnetic valve
- temperature setting via thermostat
- 100-240 V AC / 12 V DC, 50-60 Hz, 18 W power supply unit, incl. country-specific adapter set
   Cannot be combined with basins in conducting materials (e.g. steel. river stone).
   Cannot be combined with basins that have a closing drain.

closing drain.
ATTENTION: Separate terms and conditions for electronic articles are applicable.

Cannot be combined with basins in conducting materials (e.g. steel. river stone).

Cannot be combined with basins that have a closing drain.

ATTENTION: Separate terms and conditions for electronic articles are applicable.

35 741 970 90

#### Required miscellaneous



eSET Touchfree Basin mixer with temperature setting for combining with wall-mounted fittings -

•max. recess depth 125 mm

•min. recess depth 90 mm

#### Recommended miscellaneous

**Extension for Touchfree 500 mm -** 12 765 970 90


#### Required miscellaneous




eSET Touchfree Basin mixer with 35 740 970 90 temperature setting for combining with free-standing fittings -



ST 010 107 3080 mm [inches]





#### Certificates


LGA\_29120. WRAS\_1906116. IAPMO\_EGS. CE000001\_eSet\_Tou CE000002\_eSet\_Tou

chfree\_20171206\_D chfree\_20171206\_E E\_signed. N\_signed.

LGA\_29119.



ST 010 107 3980

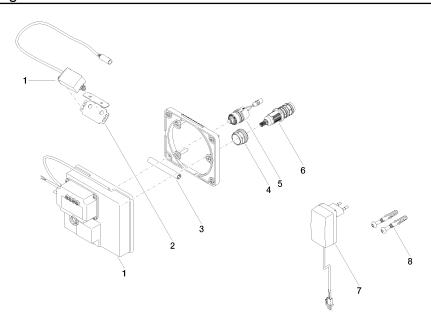

### Spare parts list

Item Number	Name	Quantity used	Delivery time
90 10 01 177 00 90	electronic accessories	1	2
90 17 20 199 00 90	holder	1	2
90 23 01 124 00 90	sleeve	1	2
09 23 10 129 90	nut	1	2
04 30 50 079 00 90	valve	1	2
90 15 02 013 00 90	cartridge	1	2
04 10 01 246 00 90	electronic accessories	1	2
04 30 31 024 01 90	fixing set	1	2
	90 10 01 177 00 90 90 17 20 199 00 90 90 23 01 124 00 90 09 23 10 129 90 04 30 50 079 00 90 90 15 02 013 00 90 04 10 01 246 00 90	90 10 01 177 00 90 electronic accessories 90 17 20 199 00 90 holder 90 23 01 124 00 90 sleeve 09 23 10 129 90 nut 04 30 50 079 00 90 valve 90 15 02 013 00 90 cartridge 04 10 01 246 00 90 electronic accessories	90 10 01 177 00 90 electronic accessories 1 90 17 20 199 00 90 holder 1 90 23 01 124 00 90 sleeve 1 09 23 10 129 90 nut 1 04 30 50 079 00 90 valve 1 90 15 02 013 00 90 cartridge 1 04 10 01 246 00 90 electronic accessories 1







- 165mm projection
- fixed spout
- circular, air-enriched flow
- height of mixer 230 mm
- height up to aerator 205 mm
- hole diameter 35 mm
- rosette 60 x 60 mm
- 2x screw-in M 10 x 1 pressure hose, leak-tested
- 1/2" connection
- max. flow 7 l/min
- lead-free







#### Flow rate chart



#### Certificates

ETA\_18519.

LGA\_18651.



