

#### ST 010 107 5980



- 165mm projection
- fixed spout
- circular, air-enriched flow
- height of mixer 230 mm
- height up to aerator 205 mm
- hole diameter 35 mm
- $\bullet$  2x screw-in M 10 x 1 pressure hose, leak-tested
- 1/2" connection
- max. flow 7 l/minlead-free
- lead-free
- automatic hygiene flush
- suitable for thermal disinfection
- adjustable follow-up time
- high-frequency sensors with self-calibration
- magnetic valve
- 100-240 V AC / 12 V DC, 50-60 Hz, 18 W power supply unit, incl. country-specific adapter set Cannot be combined with basins in conducting materials (e.g. steel. river stone).
   Cannot be combined with basins that have a closing drain.
   ATTENTION: Separate terms and conditions for
- electronic articles are applicable.

### Individual components of this set

1x

You need the following components for this set



42 766 970 90

1x 13 721 980-00







	eSET Touchfree Basin m without temperature setti combining with free-stan	ing for	35 742 970 90	10	eSET Touchfree Basin mixer without temperature setting for combining with wall-mounted	35 743 970 90	
Required miscellaneous			Required miscellaneous				
			ION: Separate terms a ic articles are applicab	le.			
		Cannot be combined with basins that have a closing drain.					
		Cannot be combined with basins in conducting materials (e.g. steel. river stone).					
	ULU, MADISON, MEM, TARA, Y VAIA, META, CYO	<ul> <li>suitable</li> <li>adjusta</li> <li>high-free</li> <li>magnee</li> <li>100-24</li> <li>supply</li> <li>Cannot</li> <li>materia</li> <li>Cannot</li> <li>closing</li> <li>ATTEN</li> </ul>	0 V AC / 12 V DC, 50 unit, incl. country-spe be combined with b Is (e.g. steel. river st be combined with b	self-calibration 60 Hz, 18 W p cific adapter se asins in condu one). asins that hav s and conditic	ower tt ucting e a		

Extension for Touchfree 500 mm - 12 765 970 90



ST 010 107 5080 mm [inches]






Certificates								
LGA_29120.	WRAS_1906116.	IAPMO_EGS.	chfree_20171206_D	CE000002_eSet_Tou chfree_20171206_E N_signed.				

LGA\_29119.



ST 010 107 5980

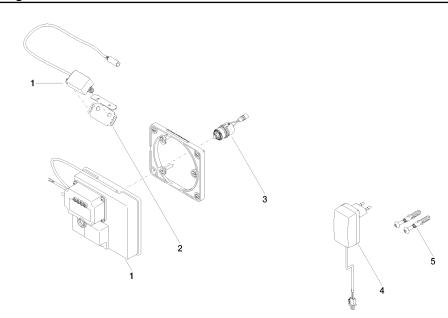

### Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 10 01 177 00 90	electronic accessories	1	2
2	90 17 20 199 00 90	holder	1	2
3	04 30 50 079 00 90	valve	1	2
4	04 10 01 050 00 90	power supply	1	60
5	04 30 31 024 01 90	fixing set	1	2







- 165mm projection
- fixed spout
- circular, air-enriched flow
- height of mixer 230 mm
- height up to aerator 205 mm
- hole diameter 35 mm
- rosette 60 x 60 mm
- 2x screw-in M 10 x 1 pressure hose, leak-tested
- 1/2" connection
- max. flow 7 l/min
- lead-free







### Flow rate chart



### Certificates

ETA\_18519. LGA\_18651.



