



IMO Wall-mounted basin spout without pop-up waste - Brushed Chrome

IMO


13 800 671 Product version from 4/1/2024




- 170mm projection
 - fixed spout
 - rectangular, air-enriched flow
 - hole diameter 40 mm
 - rosette 80 x 60 mm
 - 1/2" connection
 - max. flow 4.6 l/min
 - lead-free
 - This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- For Touchfree control please order eSet Touchfree with temperature adjustment**
- For Touchfree control please order eSet Touchfree with temperature adjustment

	Brushed Chrome	13 800 671-93 0010
	Chrome	13 800 671-00 0010

Required miscellaneous

	Concealed adapter -	35 080 970-90 0010
---	----------------------------	--------------------

mm [inches]

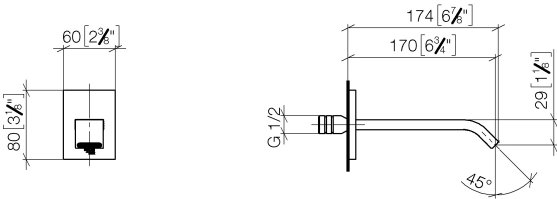


Codes & Standards

ASME A112.18.1	cUPC	EPA WaterSense	NSF372
NSF61	WaterSense		

Certificates and sustainability

IAPMO_8834	IAPMO_N-4976	IAPMO_6397	IAPMO_4976 (
------------	--------------	------------	--------------

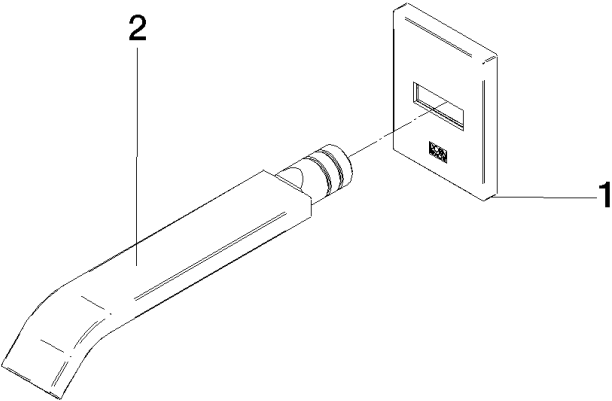

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
2	90 28 22 413 00-93	spout	1.00	20
1	90 27 67 023 00-93	rosette	1.00	20