

## LOT HOT & COLD WATER DISPENSER - Platinum

LOT

17 861 680 Product version from 4/1/2014 to 5/27/2021



- 145mm projection
- rigid, thermally insulated spout
- laminar flow
- height of mixer 233 mm
- height up to laminar flow regulator 213 mm
- hole diameter 35 mm
- provides filtered, hot water up to 93°C
- provides filtered, cold water
- max. flow 2 l/min at 3 bar flow pressure
- ready-to-use control unit for wall mounting (137mm x 159mm x 60mm)
- electronic magnetic valve
- 100-230 V, 50-60 Hz, 18 W power supply unit, incl. country-specific adapter set
- lead-free
- one lever for cold and hot water
- Spout ring cannot be removed.
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

NOTE: Not compatible with Reverse Osmosis

A minimum flow pressure of 3 bar is necessary for the HOT & COLD WATER DISPENSER to work perfectly in conjunction with a hot water tank and filter.

The installation must be above a kitchen sink.


The filter cartridge must be changed every six months. The installation instructions contain further information for guidance.

Detailed planning information and technical data can be found at [www.dornbracht.com/professional](http://www.dornbracht.com/professional)


|   |                                |               |
|---|--------------------------------|---------------|
|  | Platinum                       | 17 861 680-08 |
|  | Chrome                         | 17 861 680-00 |
|  | Brushed Platinum               | 17 861 680-06 |
|  | Dark Chrome                    | 17 861 680-19 |
|  | Brushed Durabronze (23kt Gold) | 17 861 680-28 |
|  | Brushed Champagne (22kt Gold)  | 17 861 680-46 |
|  | Champagne (22kt Gold)          | 17 861 680-47 |
|  | Brushed Dark Platinum          | 17 861 680-99 |

17 861 680 Product version from 4/1/2014 to 5/27/2021

mm [inches]

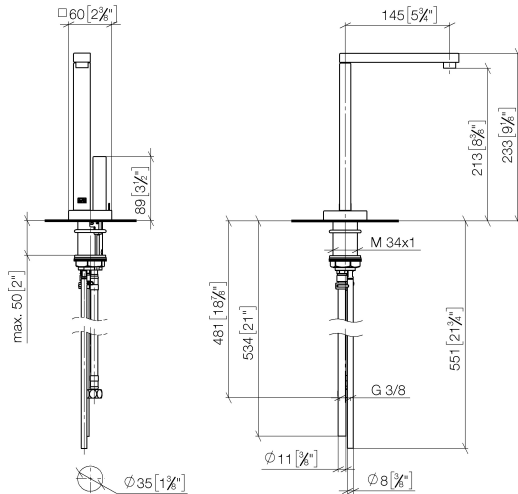

### Flow rate chart

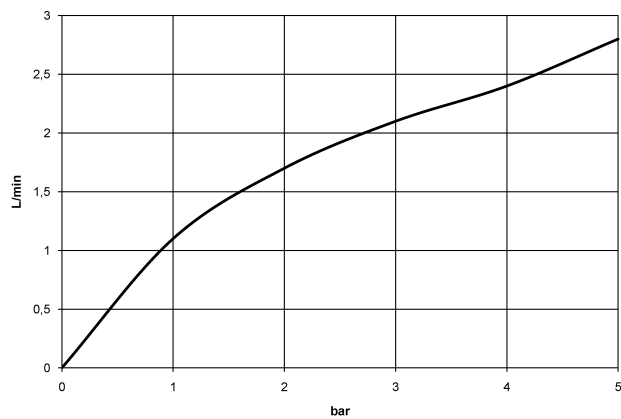

### Codes & Standards

|          |                |                                    |       |
|----------|----------------|------------------------------------|-------|
| ADA      | ASME A112.18.1 | California Energy Commission (CEC) | cUPC  |
| DIN 4109 | ISO 3822       | NSF372                             | NSF61 |

### Ü-Zeichen



LOT HOT & COLD WATER DISPENSER - Platinum

LOT

17 861 680    Product version from 4/1/2014 to 5/27/2021

Certificates and sustainability


|           |            |        |         |
|-----------|------------|--------|---------|
| IAPMO_N-4 | IAPMO_4976 | LGA_28 | IAPMO_6 |
|-----------|------------|--------|---------|

## LOT HOT & COLD WATER DISPENSER - Platinum

LOT

17 861 680 Product version from 4/1/2014 to 5/27/2021

Parts for other  
finishes can be found  
here: [Chrome](#)

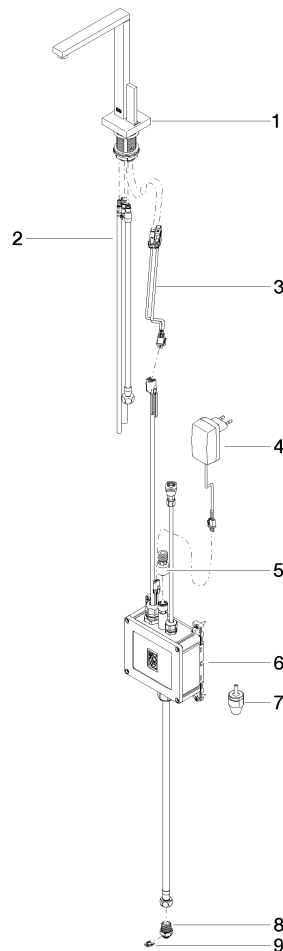

### Spare parts list

| No. | Item Number          | Name                                | Quantity used | Delivery time |
|-----|----------------------|-------------------------------------|---------------|---------------|
|     | 3 90 10 01 048 00 90 | electronic accessories              | 1.00          | 2             |
|     | 9 09 16 01 045 90    | ring                                | 1.00          | 2             |
|     | 7 90 24 04 291 00 90 | insert                              | 1.00          | 2             |
|     | 4 04 10 01 050 00 90 | power supply                        | 1.00          | 60            |
|     | 2 90 30 04 067 00 90 | hose                                | 1.00          | 2             |
|     | 8 09 24 04 293 90    | nipple                              | 1.00          | 2             |
|     | 1 90 17 85 100 03-08 | fitting                             | 1.00          | 40            |
|     | 5 12 866 970 90      | Adapter Flow restrictor HCWD 3/8" - | 1.00          | 2             |
|     | 6 90 11 11 064 01 90 | electronic accessories              | 1.00          | 2             |