







MADISON Shower set without hand shower - Brushed Dark Platinum
MADISON

26 413 370




- slide bar
 - Pipe diameter 18 mm
 - rosettes Ø 60 mm
 - gauge 850 mm
 - metal shower hose 1750mm with integrated anti-twist protection
 - shower hose connector 1/2"
 - WRAS
- This article does not include a hand shower!
- NOTE: Hand shower sold separately. Please see hand shower options under the miscellaneous articles section of each series.

	Brushed Dark Platinum	26 413 370-99
	Chrome	26 413 370-00
	Brushed Platinum	26 413 370-06
	Platinum	26 413 370-08
	Durabrand (23kt Gold)	26 413 370-09
	Brushed Durabrand (23kt Gold)	26 413 370-28

Recommended miscellaneous

	Concealed adapter -	35 080 970-90 0010
---	---------------------	--------------------

Recommended miscellaneous

	MADISON Wall elbow - Brushed Dark Platinum	28 450 370-99
---	--	---------------


Required miscellaneous

	MADISON Metal hand shower with porcelain insert (white) FlowReduce - Brushed Dark Platinum	28 002 970-99 0010
---	--	--------------------

Required miscellaneous

	MADISON Hand shower FlowReduce - Brushed Dark Platinum	28 002 978-99 0010
	<ul style="list-style-type: none"> • spray head Ø 95mm • Hand shower see page {PAGE} • Three settings: COMPACT RAIN, COMPACT SOFT FLOW, COMPACT AQUAPRESSURE FLOW, max. flow rate l/min (at 3 bar) 	

26 413 370

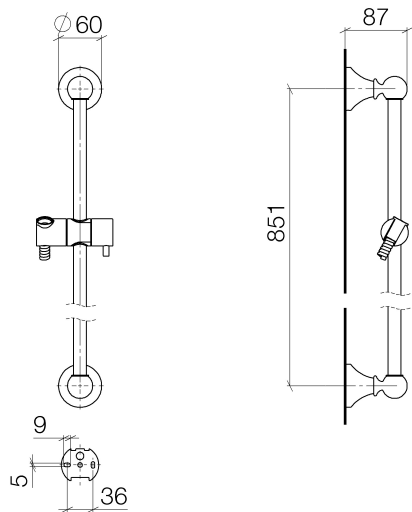

Codes & Standards			
ASME A112.18.1	cUPC	Scottish Water Byelaws	UK Water Supply Regulations

Certificates and sustainability	
WRAS_2009	IAPMO_4976



Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	05 17 97 507 00 90	fixing set	2.00	2
7	08 28 22 596-99	pipe	1.00	20
8	12 580 970-99	Slide unit - Brushed Dark Platinum	1.00	20
4	09 31 11 002 90	pin	2.00	2
9	28 204 970-99	Metal shower hose 1/2" x 1/2" x 1750 mm - Brushed Dark Platinum	1.00	2
5	09 21 40 020-99	connection	2.00	20
2	09 30 30 048 90	screw	2.00	2
6	09 18 40 009 90	sleeve	2.00	2
3	09 31 11 140 90	pin	2.00	60