

Hand shower FlowReduce - Chrome

IMO

28 017 979



Fits: IMO, LULU, MADISON, MEM, TARA,
CL.1, LISSÉ, VAIA, META, CYO

- COMPACT RAIN, max. flow rate 6.8 l/min (at 3 bar)
- with anti-scale system
- spray head Ø 130 mm
- 1/2" connection
- This product reduces water consumption by % (compared to requirements of EPAct '92)
- This product can contribute to Water Use Reduction in LEED® Green Building Rating
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

Intrinsic protection against back flow.


| | | |
|--|--------------------------------|--------------------|
|  | Chrome | 28 017 979-00 0010 |
|  | Brushed Platinum | 28 017 979-06 0010 |
|  | Platinum | 28 017 979-08 0010 |
|  | Dark Chrome | 28 017 979-19 0010 |
|  | Light Gold | 28 017 979-26 0010 |
|  | Brushed Light Gold | 28 017 979-27 0010 |
|  | Brushed Durabronze (23kt Gold) | 28 017 979-28 0010 |
|  | Matte Black | 28 017 979-33 0010 |
|  | Brushed Bronze | 28 017 979-42 0010 |
|  | Brushed Champagne (22kt Gold) | 28 017 979-46 0010 |
|  | Champagne (22kt Gold) | 28 017 979-47 0010 |
|  | Brushed Chrome | 28 017 979-93 0010 |
|  | Brushed Dark Platinum | 28 017 979-99 0010 |

Hand shower FlowReduce - Chrome


IMO

28 017 979

mm [inches]

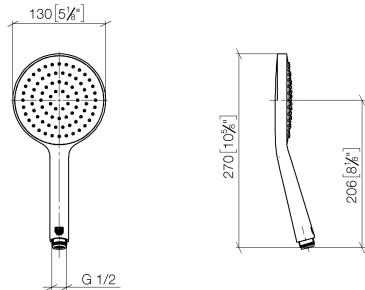

Flow rate chart

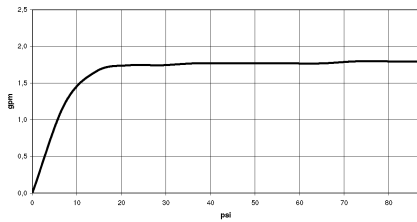

Codes & Standards

| | | | |
|----------------|---------------------------------|--|-----------|
| ASME A112.18.1 | ASME A112.18.1/CSA B125.1 | California Energy Commission (CEC) | cUPC |
| DIN 4109 | EN 1112 | ISO 3822 | Ü-Zeichen |



Hand shower FlowReduce - Chrome

IMO

28 017 979


Certificates

IAPMO_4976

DVGW_DW-
6517DN0

LGA_29

Product version from 10/1/2023

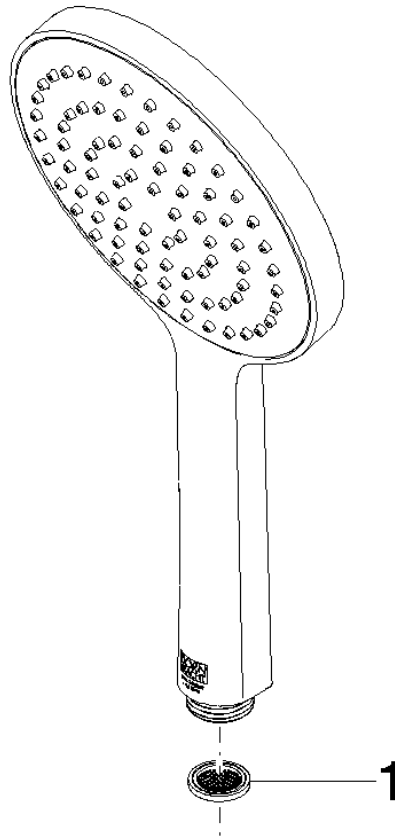



Hand shower FlowReduce - Chrome

IMO

28 017 979

Spare parts list

Product version from 10/1/2023

| No. | Item Number | Name | Quantity used | Delivery time |
|-----|-----------------|-------|---------------|---------------|
| | 09 23 01 039 90 | sieve | 1 | 2 |