













Rain shower for surface-mounted ceiling installation 300 mm - Brushed
Durabrand (23kt Gold)

TARA

28 031 970			
 <p>Fits: TARA, LISSÉ, VAIA, META</p>	<ul style="list-style-type: none"> rain shower Ø 300 mm PURE RAIN, max. flow rate 6.8 l/min (at 3 bar) PURIFY RAIN, max. flow rate 6 l/min (at 3 bar) Distance to ceiling from bottom edge of shower 40 mm with anti-scale system For simultaneous control of the jet types, we recommend the xTool thermostat module <p>Three-way diverter ensures that the product does not exceed the max. flow rate of 2.5 gpm at any setting. It does not permit the use of two functions simultaneously.</p> <p>Three-way diverter trim is sold separately</p> <p>Pre-assembly kit for three-way diverter included</p> <p>Three-way diverter ensures that the product does not exceed the max. flow rate of 2.5 gpm at any setting. It does not permit the use of two functions simultaneously.</p> <p>Three-way diverter trim is sold separately</p> <p>Pre-assembly kit for three-way diverter included</p>		<div>  Brushed Durabrand (23kt Gold) </div> 28 031 970-28 0010
			<div>  Chrome </div> 28 031 970-00 0010
			<div>  Brushed Platinum </div> 28 031 970-06 0010
			<div>  Platinum </div> 28 031 970-08 0010
			<div>  Dark Chrome </div> 28 031 970-19 0010
			<div>  Matte Black </div> 28 031 970-33 0010
			<div>  Brushed Champagne (22kt Gold) </div> 28 031 970-46 0010
			<div>  Champagne (22kt Gold) </div> 28 031 970-47 0010
			<div>  Brushed Chrome </div> 28 031 970-93 0010
			<div>  Brushed Dark Platinum </div> 28 031 970-99 0010

Required miscellaneous


	Concealed ceiling installation box for surface-mounted ceiling installation -	35 041 970-90
	<ul style="list-style-type: none"> max. recess depth 115 mm min. recess depth 90 mm Pre-assembly kit for three-way diverter included 	0010

Rain shower for surface-mounted ceiling installation 300 mm - Brushed Durabron (23kt Gold)


TARA

28 031 970

mm [inches]

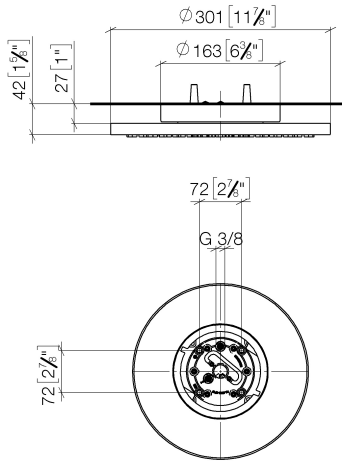


Flow rate chart

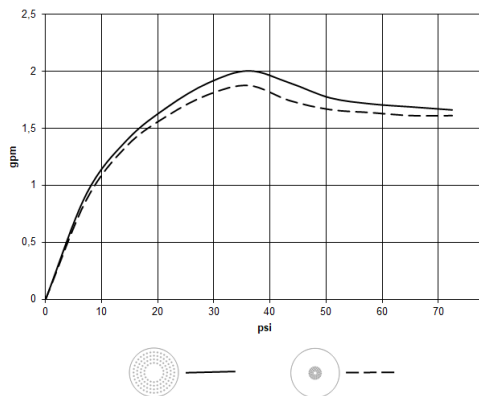

Codes & Standards

California Energy
Commission
(CEC)

28 031 970

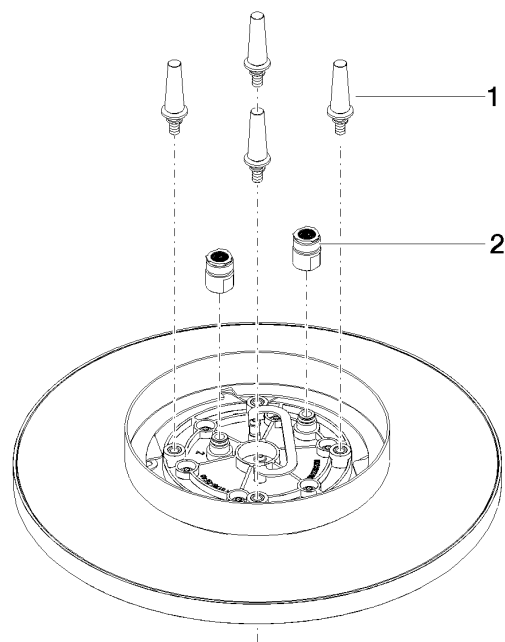

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 17 20 263 00 90	fixing set	1	2
2	90 24 03 309 02 90	connection	2	2