

Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed SERIES SPECIFIC Platinum

28 044 980 Product version from 5/1/2022



- rain shower 300 x 240mm
- PURE RAIN, max. flow rate 6.8 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- with anti-scale system

Technical dimensions:

- min. recess depth 137 mm

Ceiling module power supply

- 12V DC (CV)

Electric:

Spot lighting

- LED coloured light RGBW

Ambient lighting

- Bulbs protected against splashing water

Activation

- Provided by customer: Zigbee gateway
- ZigBee Light Link RGBW controller

Environment

Planning tips:

- Not suitable for outdoor use.
- Not suitable for use in a steam room.
- Not suitable for use in chlorinated or salty environments.
- Comply with the protection zone regulations as defined in DIN VDE 0100, Part 701 (IEC 60364-7-701).
- Dornbracht recommends consulting a systems integrator.
- WRAS

To meet the North American plumbing standards, this application must be installed with three-way diverter (rough included). includes light bulbs with a Class G energy efficiency
Three-way diverter trim is sold separately

To meet the North American plumbing standards, this application must be installed with three-way diverter (rough included).

includes light bulbs with a Class G energy efficiency

Three-way diverter trim is sold separately

| | | |
|---|-------------------------------|--------------------|
|  | Brushed Platinum | 28 044 980-06 0010 |
|  | Chrome | 28 044 980-00 0010 |
|  | Platinum | 28 044 980-08 0010 |
|  | Dark Chrome | 28 044 980-19 0010 |
|  | Brushed Light Gold | 28 044 980-27 0010 |
|  | Brushed Durabrass (23kt Gold) | 28 044 980-28 0010 |
|  | Matte Black | 28 044 980-33 0010 |
|  | Brushed Champagne (22kt Gold) | 28 044 980-46 0010 |
|  | Champagne (22kt Gold) | 28 044 980-47 0010 |
|  | Brushed Chrome | 28 044 980-93 0010 |
|  | Brushed Dark Platinum | 28 044 980-99 0010 |

Required miscellaneous




Concealed ceiling installation box for recessed ceiling installation with light - 35 044 970-90 0010

- To be provided by the customer. Zigbee Gateway!
- recess depth 137mm
- Pre-assembly kit for three-way diverter included



Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed SERIES SPECIFIC Platinum

28 044 980 Product version from 5/1/2022
mm [inches]

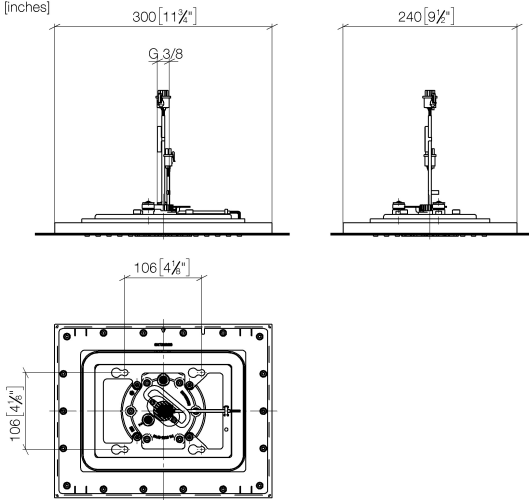

Codes & Standards


| | | | |
|----------------|------------------------------------|------|----------------|
| ASME A112.18.1 | California Energy Commission (CEC) | cUPC | EPA WaterSense |
| WaterSense | | | |

Certificates and sustainability

| | |
|-------------|------------|
| IAPMO_11777 | IAPMO_4976 |
|-------------|------------|

Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed SERIES SPECIFIC Platinum

28 044 980 Product version from 5/1/2022

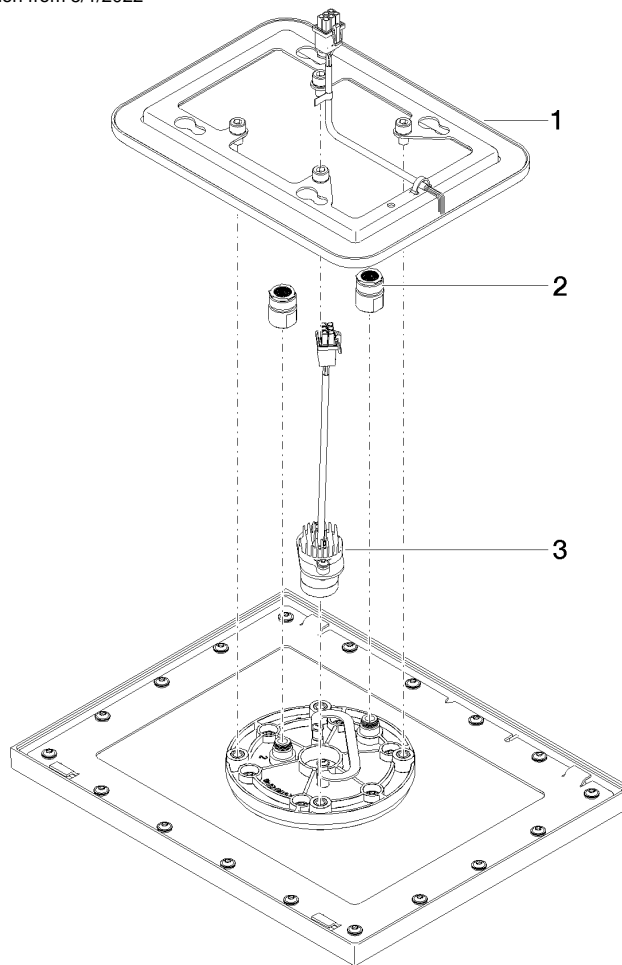

Spare parts list

| No. | Item Number | Name | Quantity used | Delivery time |
|-----|--------------------|------------------------|---------------|---------------|
| 1 | 90 10 01 224 00 90 | electronic accessories | 1.00 | 2 |
| 3 | 90 10 01 225 00 90 | electronic accessories | 1.00 | 2 |
| 2 | 90 24 03 309 02 90 | connection | 2.00 | 2 |