

## Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed Champagne (22kt Gold) SERIES SPECIFIC

28 044 980 Product version from 5/1/2022



- rain shower 300 x 240mm
- Rain panel with 2 different spray modes
- PURE RAIN, max. flow rate 6.8 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- with anti-scale system

### Technical data:

- min. recess depth 137 mm

### Ceiling module power supply

- 12V DC (CV)

### Electric:

### Spot lighting

- LED coloured light RGBW

### Ambient lighting

- Bulbs protected against splashing water

### Activation

- Provided by customer: Zigbee gateway
- ZigBee Light Link RGBW controller

### Environment

### Planning tips:

- Not suitable for outdoor use.
- Not suitable for use in a steam room.
- Not suitable for use in chlorinated or salty environments.
- Comply with the protection zone regulations as defined in DIN VDE 0100, Part 701 (IEC 60364-7-701).
- Dornbracht recommends consulting a systems integrator.
- WRAS

**To meet the North American plumbing standards, this application must be installed with three-way diverter (rough included). includes light bulbs with a Class G energy efficiency**  
**Three-way diverter trim is sold separately**

To meet the North American plumbing standards, this application must be installed with three-way diverter (rough included).

includes light bulbs with a Class G energy efficiency

Three-way diverter trim is sold separately

	Brushed Champagne (22kt Gold)	28 044 980-46 0010
	Chrome	28 044 980-00 0010
	Brushed Platinum	28 044 980-06 0010
	Platinum	28 044 980-08 0010
	Dark Chrome	28 044 980-19 0010
	Brushed Light Gold	28 044 980-27 0010
	Brushed Durabronze (23kt Gold)	28 044 980-28 0010
	Matte Black	28 044 980-33 0010
	Brushed Dark Brass	28 044 980-39 0010
	Champagne (22kt Gold)	28 044 980-47 0010
	Brushed Chrome	28 044 980-93 0010
	Brushed Dark Platinum	28 044 980-99 0010

## Required miscellaneous



**Concealed ceiling installation box for recessed ceiling installation with light -** 35 044 970-90 0010

- recess depth 137mm
- Pre-assembly kit for three-way diverter included
- To be provided by the customer. Zigbee Gateway!



## Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed SERIES SPECIFIC Champagne (22kt Gold)


---

28 044 980 Product version from 5/1/2022



Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed SERIES SPECIFIC  
Champagne (22kt Gold)

28 044 980    Product version from 5/1/2022  
mm [inches]

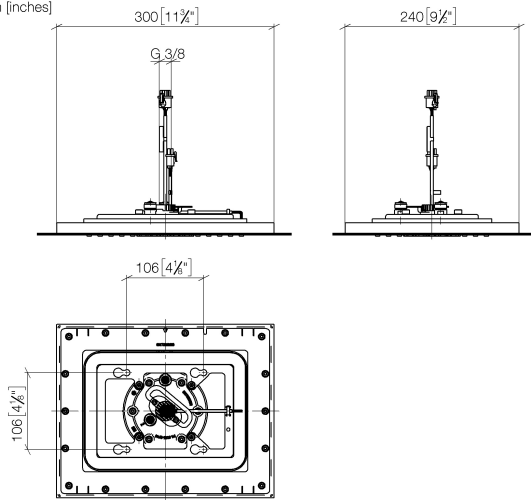

Codes & Standards


ASME A112.18.1	California Energy Commission (CEC)	cUPC	EPA WaterSense
WaterSense			

Certificates and sustainability

IAPMO\_4976    IAPMO\_11777

## Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed SERIES SPECIFIC Champagne (22kt Gold)

28 044 980 Product version from 5/1/2022

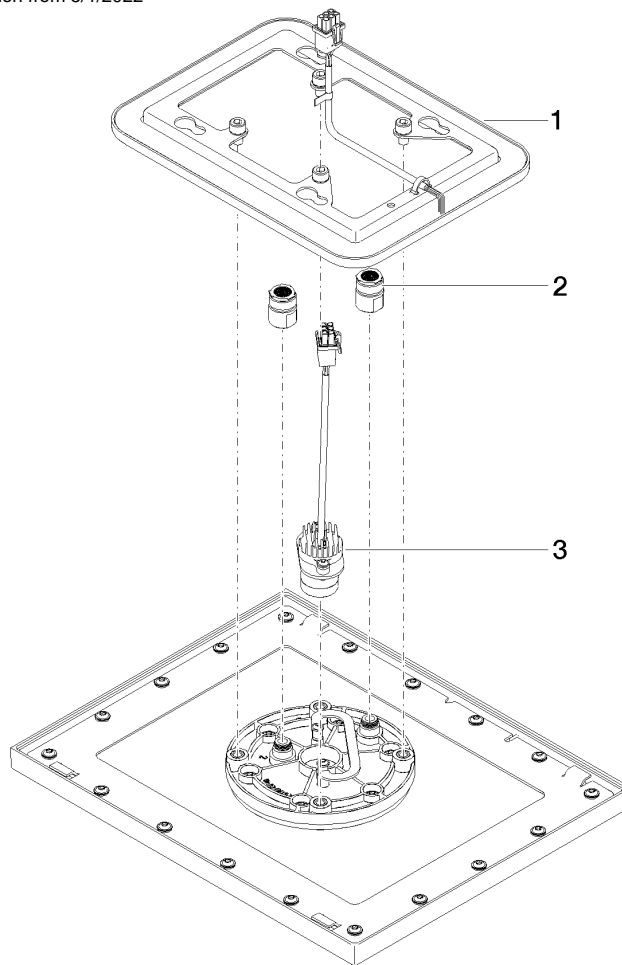

### Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
2	90 24 03 309 02 90	connection	2.00	2
3	90 10 01 225 00 90	electronic accessories	1.00	2
1	90 10 01 224 00 90	electronic accessories	1.00	2