



Rain shower for recessed ceiling installation with light 300 x 240 mm - Champagne (22kt Gold)


28 044 980 Product version from 5/1/2022



- rain shower 300 x 240mm
 - PURE RAIN, max. flow rate 6.8 l/min (at 3 bar)
 - PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
 - min. recess depth 137 mm
 - with anti-scale system
- Ceiling module power supply**
- 12V DC (CV)
- Spot lighting**
- LED coloured light RGBW
 - Bulbs protected against splashing water
- Ambient lighting**
- LED coloured light RGBW
 - Bulbs protected against splashing water
- Activation**
- ZigBee Light Link RGBW controller
 - Provided by customer: Zigbee gateway
- Environment**
- Not suitable for outdoor use.
 - Not suitable for use in a steam room.
 - Not suitable for use in chlorinated or salty environments.
 - Comply with the protection zone regulations as defined in DIN VDE 0100, Part 701 (IEC 60364-7-701).
 - Dornbracht recommends consulting a systems integrator.
- To meet the North American plumbing standards, this application must be installed with three-way diverter (rough included). includes light bulbs with a Class G energy efficiency**
- Three-way diverter trim is sold separately**
- To meet the North American plumbing standards, this application must be installed with three-way diverter (rough included).
- includes light bulbs with a Class G energy efficiency
- Three-way diverter trim is sold separately

	Champagne (22kt Gold)	28 044 980-47 0010
	Chrome	28 044 980-00 0010
	Brushed Platinum	28 044 980-06 0010
	Platinum	28 044 980-08 0010
	Dark Chrome	28 044 980-19 0010
	Brushed Light Gold	28 044 980-27 0010
	Brushed Durabross (23kt Gold)	28 044 980-28 0010
	Matte Black	28 044 980-33 0010
	Brushed Champagne (22kt Gold)	28 044 980-46 0010
	Brushed Chrome	28 044 980-93 0010
	Brushed Dark Platinum	28 044 980-99 0010


Required miscellaneous

- 
- Concealed ceiling installation box for recessed ceiling installation with light -** 35 044 970-90 0010
- recess depth mm
 - Pre-assembly kit for three-way diverter included
 - To be provided by the customer. Zigbee Gateway!




Rain shower for recessed ceiling installation with light 300 x 240 mm - Champagne (22kt Gold)

28 044 980 Product version from 5/1/2022
mm [inches]

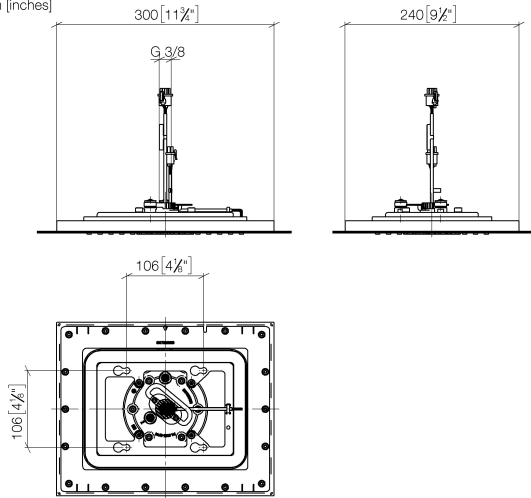

Flow rate chart

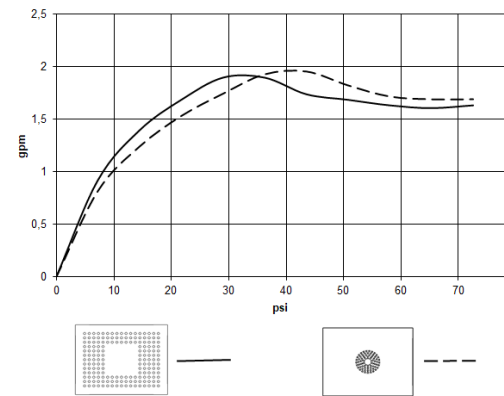

Codes & Standards

ASME A112.18.1	California Energy Commission (CEC)	cUPC	Water Sense
----------------	------------------------------------	------	-------------



Rain shower for recessed ceiling installation with light 300 x 240 mm - Champagne (22kt Gold)

28 044 980 Product version from 5/1/2022


Certificates

IAPMO_4976

Rain shower for recessed ceiling installation with light 300 x 240 mm - Champagne (22kt Gold)

28 044 980

Product version from 5/1/2022

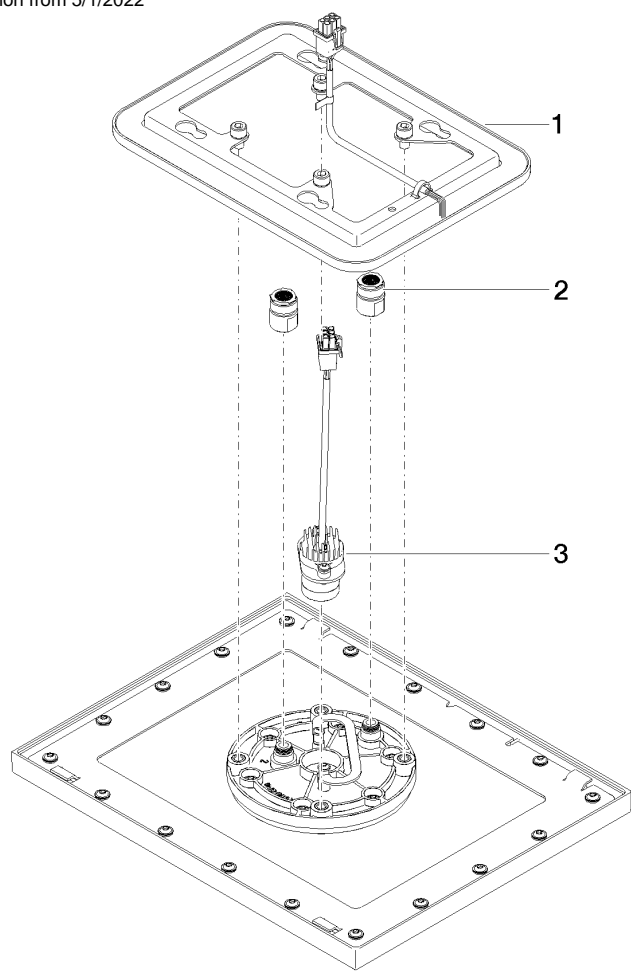

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 10 01 224 00 90	electronic accessories	1	2
2	90 24 03 309 02 90	connection	2	2
3	90 10 01 225 00 90	electronic accessories	1	2