

Rain shower with ceiling fixing 300 x 240 mm - Dark Chrome

28 775 980



- PURE RAIN, max. flow rate 6.8 l/min (at 3 bar)
- with anti-scale system
- rain shower 300 x 240mm
- distance between ceiling and lower edge of the shower 165mm
- rosette 60 x 60, as required
- 1/2" connection
- Function from: 6 l/min
- This product reduces water consumption by 28% (compared to requirements of EPAct '92)
- This product can contribute to Water Use Reduction in LEED® Green Building Rating
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB


	Dark Chrome	28 775 980-19 0010
	Chrome	28 775 980-00 0010
	Brushed Platinum	28 775 980-06 0010
	Platinum	28 775 980-08 0010
	Brushed Light Gold	28 775 980-27 0010
	Brushed Durabronze (23kt Gold)	28 775 980-28 0010
	Matte Black	28 775 980-33 0010
	Brushed Champagne (22kt Gold)	28 775 980-46 0010
	Champagne (22kt Gold)	28 775 980-47 0010
	Brushed Chrome	28 775 980-93 0010
	Brushed Dark Platinum	28 775 980-99 0010




Rain shower with ceiling fixing 300 x 240 mm - Dark Chrome

28 775 980

mm [inches]

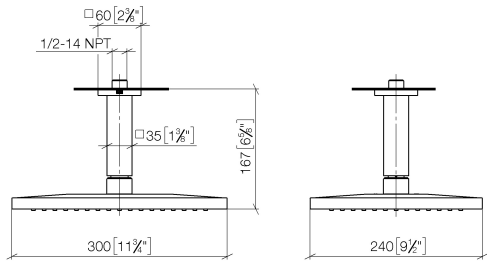

Flow rate chart

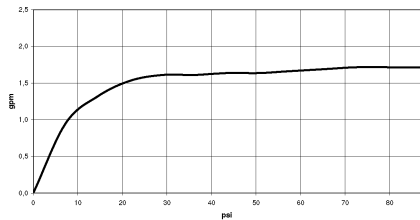

Codes & Standards

ASME A112.18.1	ASME A112.18.1/CSA B125.1	California Energy Commission (CEC)	cUPC
----------------	---------------------------	------------------------------------	------



Rain shower with ceiling fixing 300 x 240 mm - Dark Chrome

28 775 980

Certificates

IAPMO_4976

Rain shower with ceiling fixing 300 x 240 mm - Dark Chrome

28 775 980

Parts for other
finishes can be found
here: [Chrome](#)

