

LULU Rain shower with ceiling fixing 300 x 240 mm - Chrome

LULU

28 796 710 Product version from 3/13/2017



- PURE RAIN, max. flow rate 6.8 l/min (at 3 bar)
- Function from: 6 l/min
- with anti-scale system
- rain shower 300 x 240mm
- distance between ceiling and lower edge of the shower 165mm
- rosette 78 x 55, as required
- 1/2" connection
- quick clearing
- This product reduces water consumption by 28% (compared to requirements of EPA '92)
- This product can contribute to Water Use Reduction in LEED® Green Building Rating
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB



Chrome

28 796 710-00 0010



Brushed Platinum

28 796 710-06 0010

Required miscellaneous



Concealed wall elbow -

- max. recess depth 163 mm
- min. recess depth 90 mm


35 085 970-90
0010

LULU Rain shower with ceiling fixing 300 x 240 mm - Chrome

LULU

28 796 710 Product version from 3/13/2017

mm [inches]

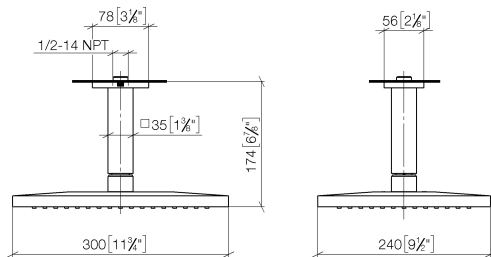

Codes & Standards


ASME A112.18.1 California Energy Commission (CEC) cUPC EPA WaterSense

WaterSense



Certificates and sustainability

IAPMO_4976 IAPMO_11777

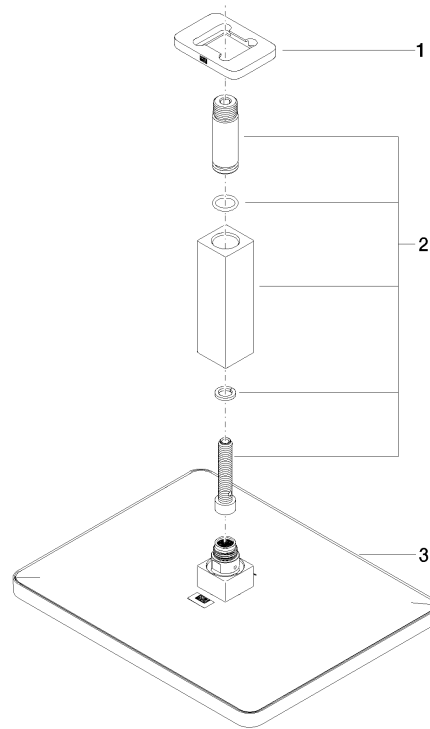

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
2	90 11 10 092 00-00	connection	1.00	10
3	04 12 05 062 10-00	shower	1.00	10
1	09 27 71 020-00	rosette	1.00	10