



LULU Rain shower with ceiling fixing 300 x 240 mm - Brushed Platinum


28 796 710    Product version from 3/13/2017



- PURE RAIN, max. flow rate 6.8 l/min (at 3 bar)
- Function from: 6 l/min
- with anti-scale system
- rain shower 300 x 240mm
- distance between ceiling and lower edge of the shower 165mm
- rosette 78 x 55, as required
- 1/2" connection
- quick clearing
- This product reduces water consumption by 28% (compared to requirements of EPAct '92)
- This product can contribute to Water Use Reduction in LEED® Green Building Rating
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

	Brushed Platinum	28 796 710-06 0010
	Chrome	28 796 710-00 0010

Required miscellaneous


	<b>Concealed wall elbow -</b>	35 085 970-90
	•max. recess depth mm	0010
	•min. recess depth mm	




LULU Rain shower with ceiling fixing 300 x 240 mm - Brushed Platinum

28 796 710    Product version from 3/13/2017


mm [inches]

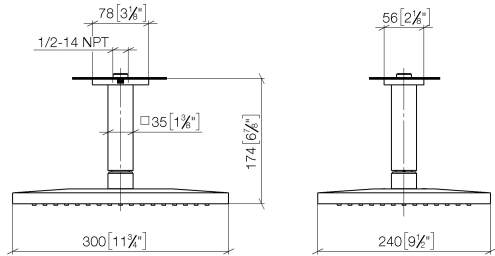

Flow rate chart

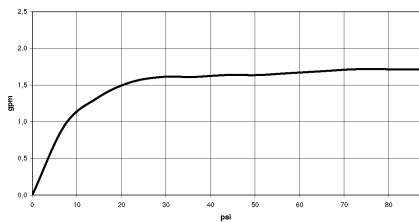

Codes & Standards

ASME A112.18.1	ASME A112.18.1/CSA B125.1	California Energy Commission (CEC)	cUPC
EPA WaterSense	Water Sense	WaterSense	



## LULU Rain shower with ceiling fixing 300 x 240 mm - Brushed Platinum

---

28 796 710 Product version from 3/13/2017

### Certificates


---

IAPMO\_4976

IAPMO\_11777

# LULU Rain shower with ceiling fixing 300 x 240 mm - Brushed Platinum

28 796 710    Product version from 3/13/2017

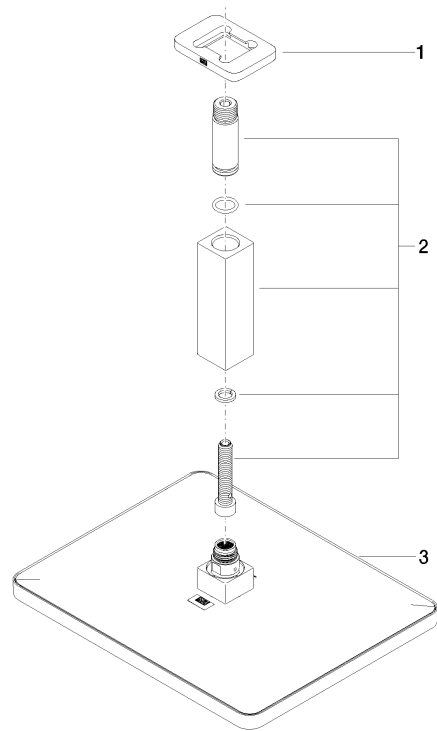

## Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	09 27 71 020-06	rosette	1	10
2	90 11 10 092 00-06	connection	1	10
3	04 12 05 062 10-06	shower	1	10