

SYNC Single-lever mixer Pull-down with spray function - Matte Black

SYNC

33 870 895 Product version from 11/1/2024



- 240mm projection
- pivotable spout 360°
- Optional swivel limiter available with swivel limiter set 12 821 970 90
- laminar and spray flow
- height of mixer 444 mm
- height up to laminar flow regulator 240 mm
- hole diameter 35 mm
- 2 x pressure hose with 3/8" cap nut
- 1800 mm metal shower hose
- sprayface with anti-scaling system
- max. flow 5.7 l/min at 3 bar flow pressure
- lead-free
- Flow modes can be changed while the water is running
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

Intrinsic protection against back flow.

Push button locks into spray mode when pressed. To switch back to laminar flow the water must be turned off.

	Matte Black	33 870 895-33 0010
	Chrome	33 870 895-00 0010
	Brushed Platinum	33 870 895-06 0010
	Platinum	33 870 895-08 0010
	Durabrand (23kt Gold)	33 870 895-09 0010
	Dark Chrome	33 870 895-19 0010
	Brushed Durabrand (23kt Gold)	33 870 895-28 0010
	Brushed Bronze	33 870 895-42 0010
	Brushed Champagne (22kt Gold)	33 870 895-46 0010
	Champagne (22kt Gold)	33 870 895-47 0010
	Brushed Chrome	33 870 895-93 0010
	Brushed Dark Platinum	33 870 895-99 0010

Recommended miscellaneous

Swivel limitation set -

12 821 970 90



Recommended miscellaneous

**AIR SWITCH Control button -
Matte Black**

10 713 970-33



Recommended miscellaneous

**Dispenser without rosette - Matte
Black**

82 424 970-33



Recommended miscellaneous

**Dispenser without rosette - Matte
Black**

82 424 970-33



Recommended miscellaneous


**AIR SWITCH Control button -
Matte Black**

10 713 970-33



33 870 895

Product version from 11/1/2024

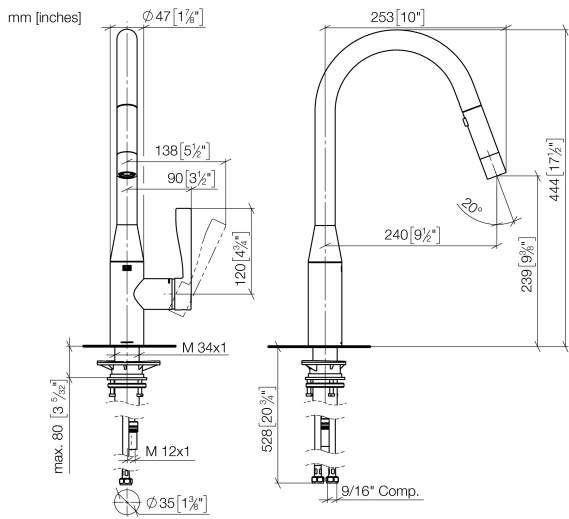

Codes & Standards			
ADA	ASME A112.18.1	California Energy Commission (CEC)	cUPC
NSF372	NSF61		

Certificates and sustainability		
IAPMO_N-4976	IAPMO_6397	IAPMO_4976 (

